

# **A Total Maximum Daily Load Analysis for the Pequabuck River Sub-Regional Basin**

**FINAL-September 29, 2009**

This document has been established pursuant  
to the requirements of Section 303(d)  
of the Federal Clean Water Act

---

Betsey Wingfield, Chief  
Bureau of Water Protection and Land Reuse

---

Date

---

Amey Marrella, Acting Commissioner

---

Date



**STATE OF CONNECTICUT  
DEPARTMENT OF  
ENVIRONMENTAL PROTECTION**  
79 Elm Street  
Hartford, CT 06106-5127  
(860) 424-3020

## TABLE OF CONTENTS

Introduction	1
Priority Ranking	3
Description of Waterbody	3
Pollutant of Concern and Pollutant Sources	3
Applicable Surface Water Quality Standards	4
Numeric Water Quality Target	5
Margin of Safety	7
Seasonal Analysis	7
TMDL Implementation	7
Water Quality Monitoring Plan	9
Reasonable Assurance	11
Provisions for Revising the TMDL	11
Public Participation	12
References	13

## TABLES

Table 1	The status of impairment for each subject waterbody based on the 2008 <i>List</i>
Table 2	Potential sources of bacteria for each of the subject waterbodies
Table 3	Treatment Plant discharge NPDES #s and locations
Table 4	Applicable indicator bacteria criteria for the subject waterbodies
Table 5	Summary of the TMDL analysis

## FIGURES

Figure 1	Basin Location Map	14
Figure 2	Designated MS4 Areas Map	15
Figure 3	All Documented Basins Land Use and TMDL Percent Reductions Map	16
Figure 4	Pequabuck Basin Land Use and TMDL % Reductions Map	17
Figure 5	Poland River Basin Land Use and TMDL % Reductions Map	18
Figure 6	Coppermine Brook Basin Land Use and TMDL % Reductions Map	19

## APPENDICES

Appendix A	Site Specific Information and TMDL Calculations
Appendix B	Municipal Stormwater Alternative Monitoring Guidance
Appendix C	Cumulative Frequency Distribution Function Method

## INTRODUCTION

A Total Maximum Daily Load (TMDL) analysis was completed for indicator bacteria in the Pequabuck River Sub-Regional Basin. The waterbodies included in this TMDL analysis are the Pequabuck River, Coppermine Brook, and Poland River (Figure 1). These waterbodies are included on the *2008 List of Connecticut Waterbodies Not Meeting Water Quality Standards*<sup>1</sup> (*2008 List*) due to exceedences of the indicator bacteria criteria contained within the *State Water Quality Standards* (WQS)<sup>2</sup>. Under section 303(d) of the Federal Clean Water Act (CWA), States are required to develop TMDLs for waters impaired by pollutants that are included on the *2008 List* for which technology-based controls are insufficient to achieve water quality standards. Please refer to the *2008 List* for more information on impaired waterbodies throughout the State. The *2008 List* is included as Appendix C in the *2008 Integrated Water Quality Report to Congress*<sup>3</sup>, which contains information regarding all assessed waterbodies in the State.

In general, the TMDL represents the maximum loading that a waterbody can receive without exceeding the water quality criteria, which have been adopted into the WQS for that parameter. In this TMDL, loadings are expressed as the average percent reduction from current loadings that must be achieved to meet water quality standards. The United States Environmental Protection Agency's (EPA) November 15, 2006 memorandum entitled *Establishing TMDL 'Daily' Loads in Light of the Decision by the U.S. Court of Appeals for the D.C. Circuit in Friends of the Earth, Inc. v. EPA, et al., No.05-5015, (April 25, 2006) and Implications for NPDES Permits*<sup>4</sup>, recommends that TMDL submittals express allocations in terms of daily time increments. The percent reduction TMDLs for the Pequabuck River Sub-Regional Basin are applicable each and every day until recreational use goals are attained. Federal regulations require that the TMDL analysis identify the portion of the total loading which is allocated to point source discharges (termed the Wasteload Allocation or WLA) and the portion attributed to nonpoint sources (termed the Load Allocation or LA), which contribute that pollutant to the waterbody. In addition, TMDLs must include a Margin of Safety (MOS) to account for uncertainty in establishing the relationship between pollutant loadings and water quality. Seasonal variability in the relationship between pollutant loadings and WQS attainment is also considered in this TMDL analysis.

The Pequabuck River Sub-Regional Basin extends into the Connecticut municipalities of Harwinton, Burlington, Plymouth, Farmington, Bristol, New Britain, Plainville, and Wolcott. Within each of these municipalities are designated urban areas, as defined by the US Census Bureau<sup>5</sup> (Figure 2). These municipalities are required to comply with the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4 permit). The general permit is applicable to municipalities that are identified in Appendix A of the MS4 permit, that contain designated urban areas and discharge stormwater via a separate storm sewer system to surface waters of the State. The permit requires municipalities to develop a program to reduce the discharge of pollutants, as well as to protect water quality. The Stormwater

Management Plan (plan) must include the following six control measures: public education and outreach; public participation; illicit discharge detection and elimination; management of stormwater from construction sites (greater than 1 acre); post-construction stormwater management; and pollution prevention and good housekeeping. Each regulated municipality must identify, implement, and measure the effectiveness of measures utilized to comply with plan requirements. Additional information regarding the general permit can be obtained on the Connecticut Department of Environmental Protection (DEP) website at [http://www.ct.gov/dep/cwp/view.asp?a=2721&q=325702&depNav\\_GID=1654](http://www.ct.gov/dep/cwp/view.asp?a=2721&q=325702&depNav_GID=1654).

TMDLs that have been established by states are submitted to the Regional Office of the (EPA) for review. The EPA can either approve the TMDL or disapprove the TMDL and act in lieu of the State. TMDLs provide a scientific basis for local stakeholders to develop and implement Watershed Based Management Plans (WBMP), which describe the control measures necessary to achieve acceptable water quality conditions. Therefore, WBMPs derived from TMDLs typically include an implementation schedule and a description of ongoing monitoring activities to confirm that the TMDL will be effectively implemented and that WQS are achieved and maintained where technically and economically feasible. Public participation during development of the TMDL analysis and subsequent preparation of WBMPs is vital to the success of resolving water quality impairments.

TMDL analyses for indicator bacteria in the Pequabuck River Sub-Regional Basin are provided herein. As required in a TMDL analysis, load allocations are determined, a margin of safety is included, and seasonal variation is considered. This document also includes recommendations for a water quality monitoring plan, as well as a discussion of guidance for TMDL Implementation.

## PRIORITY RANKING

Table 1. The impairment status and TMDL development priority for each subject waterbody based on the 2008 *List*.

Waterbody Name	Waterbody Segment ID	Waterbody Segment Description	303(d) Listed (Yes/No)	Impaired Use Cause	Priority
Coppermine Brook	CT4314-00_01	From mouth at Pequabuck River, upstream to New Britain drinking water watershed boundary and water diversion (just upstream of confluence with Polkville Brook), Bristol.	Yes	Recreation <i>Escherichia coli</i>	H
Poland River	CT4313-00_02	From confluence with Marsh Brook, upstream to confluence with unnamed Brook4313-03_01, upstream of Judd Road crossing (parallel with route 72), Plymouth.	Yes	Recreation <i>Escherichia coli</i>	H
Pequabuck River	CT 4315-00_01 CT 4315-00_02 CT 4315-00_03 CT 4315-00_04 CT 4315-00_05 CT 4315-00_06	From mouth at Farmington River, Plainville upstream to headwaters South of Rocky Road, Harwinton	Yes	Recreation <i>Escherichia coli</i>	H

"H" indicates that the waterbody is a high priority because assessment information suggested a TMDL may be needed to restore the water quality impairment and a TMDL was planned for development within 3 years.

## DESCRIPTION OF EACH WATERBODY

See "Site Specific Information" in Appendix A-1, A-2, and A-3.

## POLLUTANT OF CONCERN AND POLLUTANT SOURCES

Potential sources of indicator bacteria include point and nonpoint sources, such as stormwater runoff and illicit discharges/hook ups to storm sewers. Potential sources that are tentatively identified based on land-use (Figure 3) for each of the waterbodies are presented in Table 2.

Table 2. Potential sources of bacteria for each subject waterbody.

Waterbody Name	Nonpoint sources	Point Sources
Coppermine Brook	Unspecified Urban Stormwater, Source Unknown	Regulated stormwater runoff, Illicit connections/Hook ups to storm sewers,
Poland River	Unspecified Urban Stormwater, Source Unknown	Regulated stormwater runoff, Illicit connections/Hook ups to storm sewers
Pequabuck River	Unspecified Urban Stormwater, Source Unknown	Regulated stormwater runoff, Illicit connections/Hook ups to storm sewers

There are three municipal wastewater treatment plants (Bristol WPCF, Plymouth WPCF, and Plainville WPCF) that discharge to the Pequabuck River and receive indicator bacteria limits in their National Pollutant Discharge Elimination (NPDES) Permits. Disinfection required under the NPDES Permit is sufficient to reduce indicator bacteria densities to below levels of concern in the effluent when in use and functioning properly (See Numeric Water Quality Target for further explanation).

Table 3. Treatment plant discharges and the associated NPDES permit numbers.

Facility Name	NPDES Permit #	Discharges to
Bristol Water Reclamation Facility	CT0100374	Pequabuck River (CT4315-00_01)
Plainville WPCF	CT0100455	Pequabuck River (CT4315-00_03)
Plymouth WPCF	CT0100463	Pequabuck River (CT4315-00_06)

## APPLICABLE SURFACE WATER QUALITY STANDARDS

Connecticut's WQS establish criteria for bacterial indicators of sanitary water quality that are based on protecting recreational uses such as swimming (both designated and non-designated swimming areas), kayaking, wading, water skiing, fishing, boating, aesthetic enjoyment and others. Indicator bacteria criteria are used as general indicators of sanitary quality based on the results of EPA research<sup>6</sup> conducted in areas with known human fecal material contamination. The EPA established a statistical correlation between levels of indicator bacteria and human illness rates, and set forth guidance for States to establish numerical criteria for indicator bacteria organisms so that recreational use of the water can occur with minimal health risks. However, it should be noted that the correlation between indicator bacteria densities and human illness rates varies greatly between sites and the presence of indicator bacteria does not necessarily indicate that human fecal material is present since indicator bacteria occur in all warm-blooded animals.

The applicable water quality criteria for indicator bacteria to the Pequabuck River Sub-Regional Basin are presented in Table 4. These criteria are applicable to all recreational uses established for these waters. However, it should be noted that the water quality classification and target criteria should not be considered as a certification of quality by the State or an

approval to engage in certain activities such as swimming. Full body contact should be avoided immediately downstream of wastewater treatment plants, in areas known to have high levels *E.coli*, and during times when *E.coli* levels are expected to be particularly high, such as during and following storm events.

Table 4. Applicable indicator bacteria criteria for the subject waterbodies.

Waterbody	Waterbody Segment ID	Class	Bacterial Indicator	Criteria
Coppermine Brook	CT4314-00_01	A	<i>Escherichia coli</i> ( <i>E. coli</i> )	Geometric Mean less than 126/100ml Single Sample Maximum 576/100ml
Poland River	CT4313-00_01 CT4313-00_02	A		
Pequabuck River	CT 4315-00_01 CT 4315-00_02 CT 4315-00_03 CT 4315-00_04 CT 4315-00_05 CT 4315-00_06	A, B/C, B		

## NUMERIC WATER QUALITY TARGET

TMDL calculations are performed consistent with the analytical procedures presented in the guidelines for *Development of TMDLs for Indicator Bacteria in Contact Recreation Areas Using the Cumulative Frequency Distribution Function Method*<sup>7</sup> included as Appendix C. All data used in the analysis and the results of all calculations are presented in Appendix A. The results are summarized in Table 5 below.

Table 5. Summary of TMDL analysis.

Waterbody	Waterbody Segment Description	Segment ID	Monitoring Site	Average Percent Reduction to Meet Water Quality Standards			
				TMDL	WLA	LA	MOS
Coppermine Brook	From mouth at Pequabuck River, upstream to New Britain drinking water watershed boundary and water diversion (just upstream of confluence with Polkville Brook), Bristol.	CT4314-00_01	33	88	89	87	Implicit
Poland River	From confluence Pequabuck River, upstream to confluence with unnamed Brook4313-03_01, upstream of Judd Road crossing (parallel with route 72), Plymouth.	CT4313-00_01#	277	14	17	12	Implicit
		CT4313-00_02					
Pequabuck River	From mouth at Farmington River, Plainville upstream to headwaters South of Rocky Road, Harwinton.	CT4315-00_01	1974	79	81	78	Implicit
		CT4315-00_01	1095	79	81	78	Implicit
		CT4315-00_02	258	83	85	82	Implicit
		CT4315-00_02	267	79	83	77	Implicit
		CT4315-00_03	399	36	19	46	Implicit
		CT4315-00_03	781	76	78	75	Implicit
		CT4315-00_03	712	63	61	64	Implicit
		CT4315-00_04*					
		CT4315-00_05	711	55	56	54	Implicit
		CT4315-00_05	265	17	39	4	Implicit
		CT4315-00_06	264	62	71	56	Implicit
		CT4315-00_06	263	61	68	57	Implicit

\*Current data is unavailable to conduct a TMDL analysis for segment CT4315-00\_04 on the Pequabuck River.

However, this small segment (< 0.33 miles) is located adjacent to segment that requires percent reductions.

Therefore, it is reasonable to presume that the same percent reduction applies to these segments.

#Current data is unavailable to conduct a TMDL analysis for segment CT4313-00\_01 on the Poland River.

However, the segment is small (.42 miles) and is directly downstream of a segment (CT4313-00\_02) that requires percent reductions. Landuse is similar for both segments and therefore, it is reasonable to presume that the same percent reduction applies to both segments.



The numeric target allocated to NPDES permitted discharges is “0% reduction” because disinfection reduces bacteria densities to below levels of concern as stated in the Guidelines<sup>7</sup>. The current NPDES permits for the three municipal wastewater treatment plants (WWTPs) require disinfection from May 1 - September 30 (See Seasonal Analysis below). Under the NPDES Permits, indicator bacteria (fecal coliform) cannot exceed a geometric mean of 200 col/100mLs over a 30-day period or a single sample maximum of 400 col/100mLs. The indicator bacteria used in this TMDL is *E.coli*, which is one of several species that make up the fecal coliform group. Therefore, only a portion of fecal coliform densities account for *E.coli* in the sample and *E.coli* densities are always lower than total fecal coliform densities. Based on this information, NPDES Permit limits for the WWTPs are sufficient to reduce *E.coli* to below levels of concern and do not need to be reduced further as part of the waste load allocation. Also, WWTPs and industrial dischargers are required to sample effluent through the disinfection period and submit monitoring reports to DEP. DEP reviews the monitoring reports and takes action to mitigate any problems when there are consistent violations of the Permit. Based on monitoring reports submitted to DEP during the past year, there were no WWTPs which were consistently violating their permit limits for indicator bacteria in the Pequabuck River Sub-Regional Basin.

## **MARGIN OF SAFETY**

TMDL analyses are required to include a margin of safety (MOS) to account for uncertainties regarding the relationship between load and wasteload allocations, and water quality. The MOS may be either explicit or implicit in the analysis.

The analytical approach used to calculate the TMDLs incorporates an implicit MOS. Sampling results that indicate quality better than necessary to achieve consistency with the criteria are assigned a percent reduction of “zero” instead of a negative percent reduction. This creates an excess capacity that is averaged as a zero value thereby contributing to the implicit MOS. The indicator bacteria criteria used in this TMDL analysis were developed exclusively from data derived from studies conducted by EPA at high use designated public bathing areas with known human fecal contamination<sup>6</sup>. Therefore, the criteria provide an additional level of protection when applied to waters not used as designated swimming areas or contaminated by human fecal material. As a result, achieving the criteria results in an “implicit MOS”. Additional explanation concerning the implicit MOS incorporated into the analysis is provided in Appendix C.

## **SEASONAL ANALYSIS**

The TMDLs presented in this document are applicable during the typical disinfection (summer) season from May 1 to September 30. Previous investigations by the DEP into seasonal trends of indicator bacteria densities in surface waters indicate that the summer months typically exhibit the highest densities of any season<sup>8</sup>. This phenomenon is likely due to the enhanced ability of indicator bacteria to survive in surface waters and sediment when ambient temperatures more closely approximate those of warm-blooded animals, from which the bacteria originate. In

addition, resident wildlife populations are likely to be more active during the warmer months and more migratory species are present during the summer. These factors combine to make the summer, recreational period representative of "worst-case" conditions. Achieving consistency with the TMDLs through the summer months will result in achieving full support of recreational uses throughout the remainder of the year.

## **TMDL IMPLEMENTATION GUIDANCE**

The percent reductions established in this TMDL can be achieved by implementing control actions where technically and economically feasible that are designed to reduce *E. coli* loading from nonpoint sources (Load Allocation) and point sources (Waste Load Allocation). These actions may be taken by State and Local government, academia, volunteer citizens groups, and individuals to promote effective watershed management.

It is important to note that the TMDLs are effective for the entire watershed because they are a measurement of compounded impacts at a single point. As such, corrective actions must be undertaken at the source(s) whether it is a tributary or illicit discharge pipe, in order to achieve the required percent reductions. Also, the approach to TMDL Implementation is anticipated to be on a watershed wide scale, which will require that all sources within the regional basin that are contributing to the in-stream impairment be addressed. The DEP advocates that a watershed based plan for the Pequabuck River Sub-Regional Basin be developed to implement the TMDLs. This plan should follow guidelines provided by the EPA and include participation from all watershed towns. The following guidance offers suggestions regarding BMP implementation, however the goal is to allow responsible parties flexibility in developing a TMDL implementation plan (watershed based plan). The DEP supports an adaptive and iterative management approach where reasonable controls are implemented and water quality is monitored in order to evaluate for achievement of the TMDL goals and modification of controls as necessary.

Potential point sources of *E. coli* to the Pequabuck River Sub-Regional Basin include waste water treatment plants and regulated stormwater. During the disinfection season the treatment plants should not be significantly contributing *E.coli* to the waterways. Control actions for regulated stormwater include the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4 Permit). Under this permit, municipalities are required to implement minimum control measures in their Stormwater Management Plans to reduce the discharge of pollutants, protect water quality, and satisfy the appropriate water quality requirements of the Clean Water Act. The six minimum control measures are:

- Public Education and Outreach
- Public Participation/Involvement
- Illicit Discharge Detection and Elimination
- Construction Site Runoff Control

- Post-construction Runoff Control
- Pollution Prevention/Good Housekeeping

The minimum control measures include a number of Best Management Practices (BMP) for which an implementation schedule must be developed and submitted to the DEP as Part B Registration. Under the MS4 permit, all minimum control measures must be implemented by January 8, 2009. Information regarding Connecticut's MS4 permit can be found on the DEP's website at [http://www.ct.gov/dep/cwp/view.asp?a=2709&q=324154&depNav\\_GID=1643#MS4GP](http://www.ct.gov/dep/cwp/view.asp?a=2709&q=324154&depNav_GID=1643#MS4GP). In addition, the EPA has developed fact sheets, which provide an overview of the Phase II final rule and MS4 permit, and provide detail regarding the minimum control measures, as well as optional BMPs not required in Connecticut's MS4 permit. The fact sheets can be found on the EPA's website at: <http://cfpub.epa.gov/npdes/stormwater/swphases.cfm>. Some of the information includes guidance for the development and implementation of Stormwater Management Plans, as well as guidance for establishing measurable goals for BMP implementation.

Upon approval of a TMDL by EPA, Section 6(k) of the MS4 Permit requires the municipality to review its plan to determine if its stormwater discharges contribute the pollutant(s) for which the TMDL had been designated. If the municipality contributes a pollutant(s) in excess of the designated TMDL allocation, the municipality must modify its plan to implement the TMDL within four months of TMDL approval by EPA. For the discharges to the TMDL waterbody(ies), the municipality must assess the six minimum measures of its plan and modify the plan to implement additional, necessary controls for each appropriate measure. Particular focus should be placed on the following plan components: public education program, illicit discharge detection and elimination, stormwater structures cleaning, priority for the repair, upgrade, or retrofit of storm sewer structures.

The TMDLs establish a benchmark to measure the effectiveness of BMP implementation. Achievement of the TMDLs is directly linked to incorporation of the provisions of the MS4 permit by municipalities, as well as the implementation of other BMPs to address nonpoint sources. Potential nonpoint sources include domestic animal waste, wildlife and surface water base flow. BMPs for the management of nonpoint sources include nuisance wildlife control plans and pet waste ordinances. Nuisance wildlife information can be found on the DEP's website at [http://www.ct.gov/dep/cwp/view.asp?a=2723&q=325944&depNav\\_GID=1655](http://www.ct.gov/dep/cwp/view.asp?a=2723&q=325944&depNav_GID=1655). Pet waste information can be found on the CT River Coastal Conservation District website at [http://www.conservect.org/ctrivercoastal/give\\_a\\_bark\\_resources.shtml](http://www.conservect.org/ctrivercoastal/give_a_bark_resources.shtml). As progress is made implementing BMPs, the "percent reduction" needed to meet criteria will decrease.

The DEP encourages all local stakeholders to continue their efforts by working together to formulate a watershed based plan to implement the TMDL. A watershed based plan formulated at the local level will most efficiently make use of local resources by assigning tasks to responsible parties and serving as an agreed roadmap to reducing bacteria levels in the Basin.

In addition, the members of the DEP's watershed management program will continue to provide technical and educational assistance to the local municipalities and other stakeholders, as

well as identify potential funding sources, when available, for implementation of the TMDL and monitoring plan. Please use the following link for contact information for involved DEP staff: [http://www.ct.gov/dep/cwp/view.asp?a=2719&q=325624&depNav\\_GID=1654](http://www.ct.gov/dep/cwp/view.asp?a=2719&q=325624&depNav_GID=1654).

## WATER QUALITY MONITORING PLAN

A comprehensive water quality monitoring program is necessary to guide TMDL implementation efforts. The monitoring program should be designed to accomplish two objectives: source detection to identify specific sources of bacterial loading and to direct BMP implementation efforts with fixed station monitoring to quantify progress in achieving TMDL established goals.

Section 6(h)(1)(a) of the MS4 Permit specifies the following monitoring requirement:

*“Stormwater monitoring shall be conducted by the Regulated Small MS4 annually starting in 2004. At least two outfalls apiece shall be monitored from areas of primarily industrial development, commercial development and residential development, respectively, for a total of six (6) outfalls monitored. Each monitored outfall shall be selected based on an evaluation by the MS4 that the drainage area of such outfall is representative of the overall nature of its respective land use type.”*

This type of monitoring may be referred to as event monitoring because it is scheduled to coincide with a stormwater runoff event. Event monitoring can present numerous logistical difficulties for municipalities and may not be the most efficient way to measure progress in achieving water quality standards. This is particularly true for streams draining urbanized watersheds where many sources contribute to excursions above water quality criteria.

However, a comprehensive water quality monitoring program is necessary to guide TMDL implementation efforts. Therefore, the monitoring program should be designed to accomplish two objectives; source detection to identify specific sources of bacterial loading and direct BMP implementation efforts with fixed station monitoring to quantify progress in achieving TMDL established goals. In order to customize their monitoring plan to better identify TMDL pollutant sources and track the effectiveness of TMDL pollutant reduction measures, the municipality may request written approval from the DEP for an alternative monitoring program as allowed by Section 6(h)(1)(B) of the permit:

*“The municipality may submit a request to the Commissioner in writing for implementation of an alternate sampling plan of equivalent or greater scope. The Commissioner will approve or deny such a request in writing.”*

The DEP advises municipalities with discharges that contribute pollutant(s) for which a TMDL(s) has been designated to request approval for an alternative monitoring program to

address both source detection and progress quantification objectives. Source detection monitoring may include visual inspection of storm sewer outfalls under dry weather conditions, event sampling of individual storm sewer outfalls, and monitoring of ambient (in-stream) conditions at closely spaced intervals to identify “hot spots” for more detailed investigations leading to specific sources of high bacteria loads. Such monitoring may be performed by municipal staff, citizen volunteers, or contracted to an environmental consulting firm. Further guidance for an Alternative Municipal Monitoring is attached as Appendix B.

Progress in achieving TMDL established goals through BMP implementation may be most effectively gauged through implementing a fixed station ambient monitoring program. DEP strongly recommends that routine monitoring be performed at the same sites used to generate the data used to perform the TMDL calculations. Sampling should be scheduled at regularly spaced intervals during the recreational season (May 1- Sept 30). In this way the data set at the end of each season will include ambient values for both “wet” and “dry” conditions in relative proportion to the number of “wet” and “dry” days that occurred during that period. As additional data is generated over time it will be possible to repeat the TMDL calculations and compare the percent reductions needed under “dry” and “wet” conditions to the percent reductions needed at the time of TMDL adoption. Additional schedule sampling guidance can be found in Appendix C of this document.

All pollutant parameters must be analyzed using methods prescribed in Title 40, CFR, Part 136 (1990). Electronic submission of data to DEP is highly encouraged. Results of monitoring that indicate unusually high levels of contamination or potentially illegal activities should be forwarded to the appropriate municipal or State agency for follow-up investigation and enforcement. Consistent with the requirements of the MS4 permit, the following parameters should be included in any monitoring program:

- pH (SU)
- Hardness (mg/l)
- Conductivity (umos)
- Oil and grease (mg/l)
- Chemical Oxygen Demand (mg/l)
- Turbidity (NTU)
- Total Suspended Solids (mg/l)
- Total Phosphorous (mg/l)
- Ammonia (mg/l)
- Total Kjeldahl Nitrogen (mg/l)
- Nitrate plus Nitrite Nitrogen (mg/l)
- E. coli* (col/100ml)
- precipitation (in)

DEP will continue to explore ways to provide funding support for monitoring efforts linked to TMDL implementation or other activities that exceed the minimum requirements of the

MS4 permit. DEP is also committed to providing technical assistance in monitoring program design and establishing procedures for electronic data submission.

## **REASONABLE ASSURANCE**

The MS4 Permit is a legally enforceable document that provides reasonable assurance that the municipalities will take steps towards achieving the target TMDLs and reducing point sources of stormwater containing bacteria. If portions of a watershed are not subject to the Connecticut's MS4 Permit Program, the DEP has the authority to include those additional municipally-owned or municipally-operated Small MS4s located outside an Urbanized Area as may be designated by the Commissioner. This option could be pursued if future monitoring indicates non-attainment of recreational goals in the Pequabuck River Sub-Regional Basin.

The NPDES permits for all municipal wastewater treatment plants within the watershed provide an enforceable mechanism for regulating discharges of bacteria to surface waterbodies. Each permit contains limits for bacteria loading in the effluent discharging to the receiving waterbody. These limits and other components of the permit can be adjusted as needed if the wastewater discharge is shown to influence the water quality of the receiving waterbody.

In addition, the DEP continues to work with watershed stakeholders to draft Watershed Based Plans (WBPs) under the CWA 319 program. ([http://www.ct.gov/dep/cwp/view.asp?a=2719&q=335504&depNav\\_GID=1654](http://www.ct.gov/dep/cwp/view.asp?a=2719&q=335504&depNav_GID=1654)). As part of these WBPs, watershed stakeholders are required to investigate impairments and promote the implementation of nonpoint source pollution best management practices and stormwater management practices in the watershed. The DEP approves CWA 319 Watershed Based Plans, including those that address management measures to reduce bacteria and source mitigation in order to support the TMDLs. WBPs include watershed-wide and place-based recommendations aimed at reducing nonpoint sources of pollution, including bacteria. These recommended WBP projects may be eligible for CWA 319 funding, as long as such projects are not used for permit compliance.

## **PROVISIONS FOR REVISING THE TMDLs**

The DEP reserves the authority to modify the TMDLs as needed to account for new information made available during the implementation of the TMDLs. Modification of the TMDLs will only be made following an opportunity for public participation and will be subject to the review and approval of the EPA. New information, which will be generated during TMDL implementation, includes monitoring data, new or revised State or Federal regulations adopted pursuant to Section 303(d) of the Clean Water Act, and the publication by EPA of national or regional guidance relevant to the implementation of the TMDL program. The DEP will propose modifications to the TMDL analysis only in the event that a review of the new information indicates that such a modification is warranted and is consistent with the anti-degradation provisions in Connecticut Water Quality Standards. The subject waterbodies of this TMDL

analysis will continue to be included on the *List of Connecticut Water bodies Not Meeting Water Quality Standards* until monitoring data confirms that recreational uses are fully supported.


## **PUBLIC PARTICIPATION**

This TMDL document was public noticed for review and comment by the general public. A notice of Intent to Adopt was published on the CT DEP website from 7/29/09- 9/10/09. The Notice was also printed in the Hartford Courant on 7/30/09 and Bristol Press 7/30/09. All affected Municipalities were individually noticed as well as several potentially interested Non-Governmental Organizations. No formal comments were submitted from outside parties. It is expected that open forums will continue as implementation of the TMDL occurs.

## REFERENCES

- (1) Connecticut Department of Environmental Protection, 2008. Appendix C: List of Connecticut Water bodies Not Meeting Water Quality Standards. In: *Integrated Water Quality Report to Congress*. Bureau of Water Protection and Land Reuse, 79 Elm Street, Hartford, CT 06106-5127.
- (2) Connecticut Department of Environmental Protection, 2002. *Connecticut Water Quality Standards*. Bureau of Water Management, 79 Elm Street, Hartford, CT 06106-5127.
- (3) Connecticut Department of Environmental Protection, 2008. *Integrated Water Quality Report to Congress*. Bureau of Water Protection and Land Reuse, 79 Elm Street, Hartford, CT 06106-5127.
- (4) United States Environmental Protection Agency, 2006. *Establishing TMDL "Daily" Loads in Light of the Decision by the U.S. Court of Appeals for the D.C. Circuit in Friends of the Earth, Inc. v. EPA, et al., No.05-5015, (April 25, 2006) and Implications for NPDES Permits*.
- (5) U.S. Census Bureau, March 2002. [www.census.gov/geo/www/ua/ua\\_2k.html](http://www.census.gov/geo/www/ua/ua_2k.html).
- (6) United States Environmental Protection Agency, 1986. *Ambient Water Quality Criteria for Bacteria -1986*. EPA 440/5-84-002.
- (7) Connecticut Department of Environmental Protection, 2005. *Development of TMDLs for Indicator Bacteria in Contact Recreation Areas Using the Cumulative Frequency Distribution Function Method*. Bureau of Water Protection and Land Reuse, 79 Elm Street, Hartford, CT 06106-5127.
- (8) Connecticut Department of Environmental Protection, 2002. *Water Quality Summary Report for Sasco Brook, Mill River, Rooster River, Fairfield County Connecticut*. November 2002.



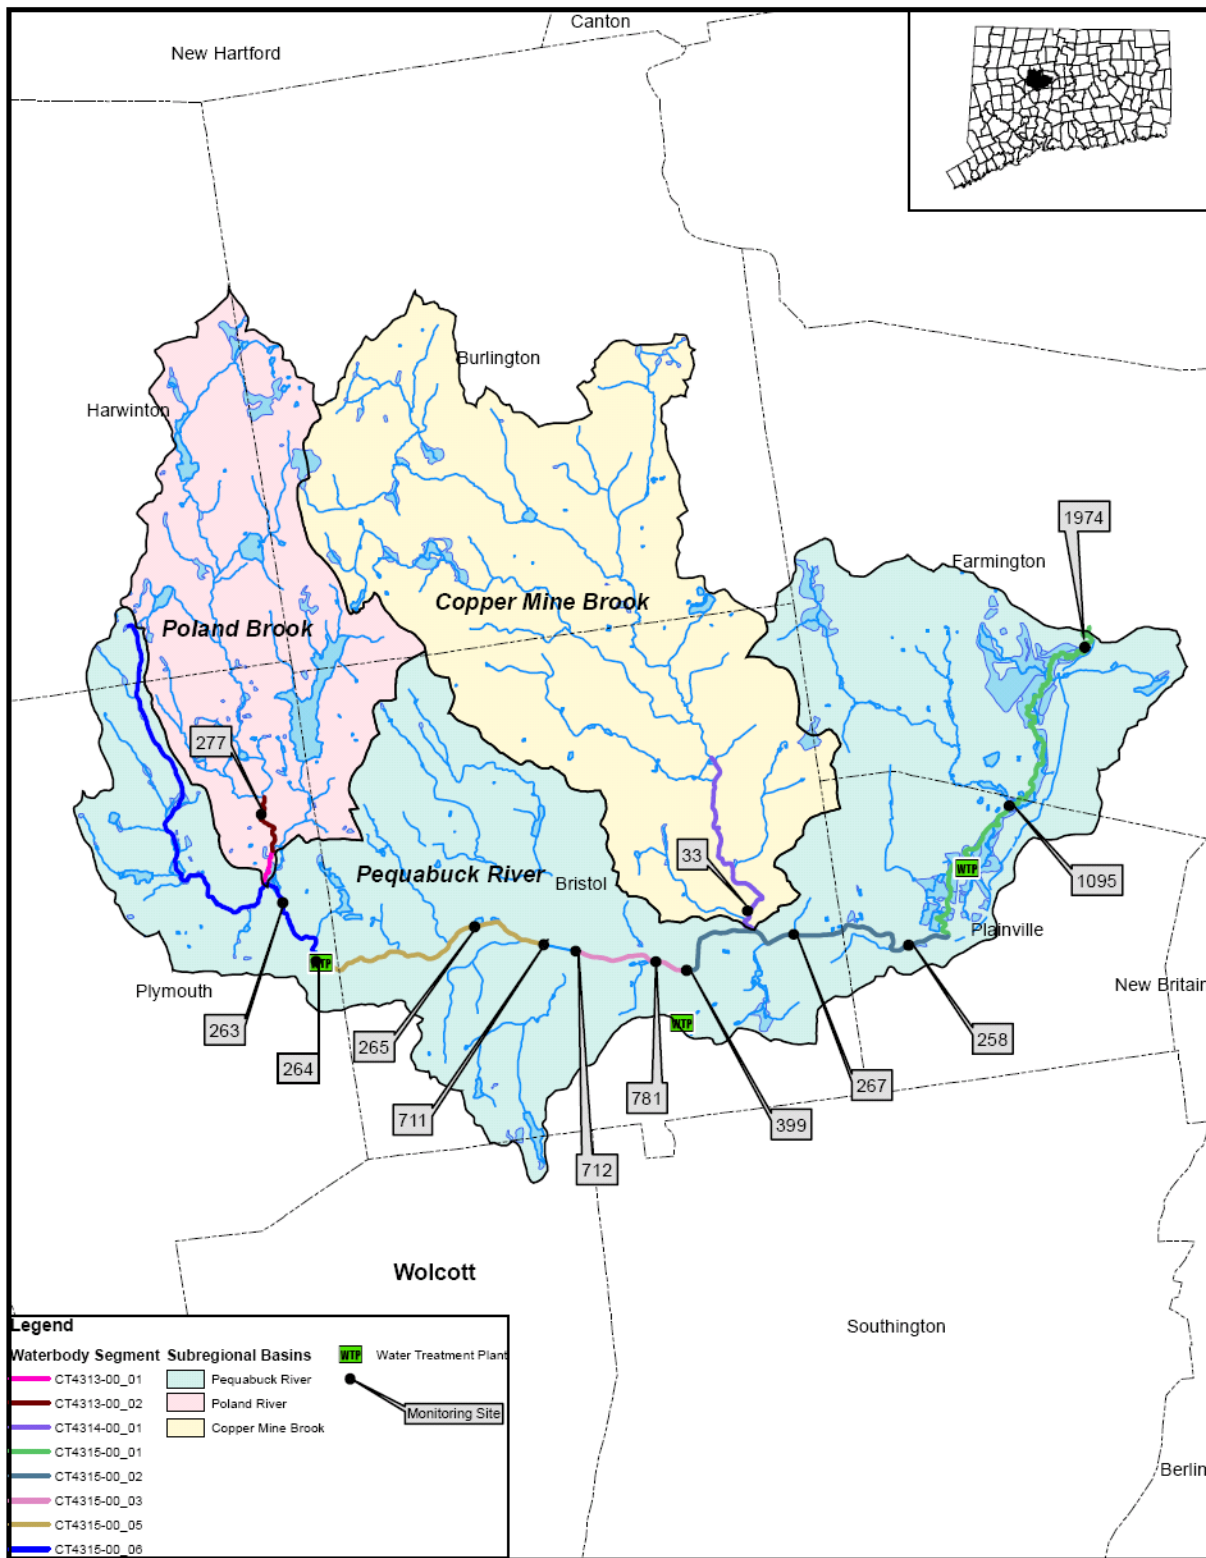


**Figure 1: Pequabuck Regional Basin Location Map**



0 0.5 1 2 3 4 5 Miles

Map Data: CTDEP  
Map Created: August 2008

FINAL *E.coli* TMDL  
Pequabuck River Sub-Regional Basin  
September 29, 2009

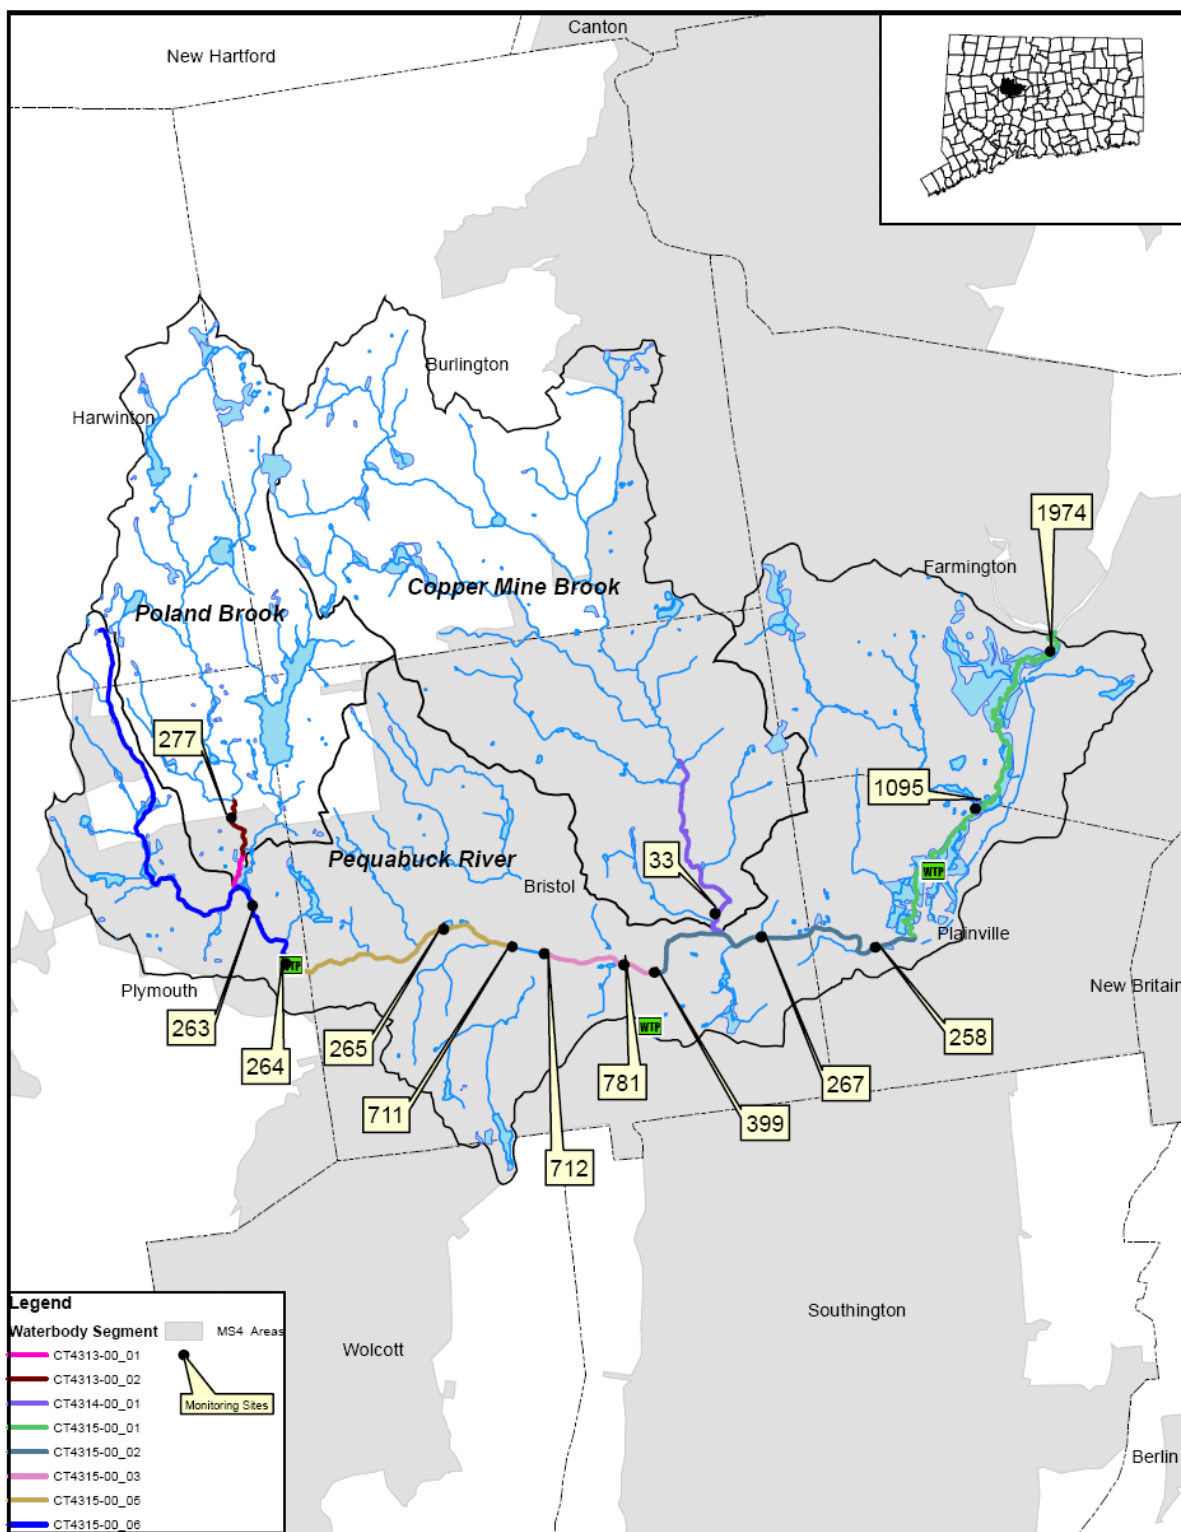


**Figure 2: Pequabuck Regional Basin Designated MS4 Area Map**




0 0.5 1 2 3 4 5 Miles

Map Data: CTDEP  
Map Created: August 2008

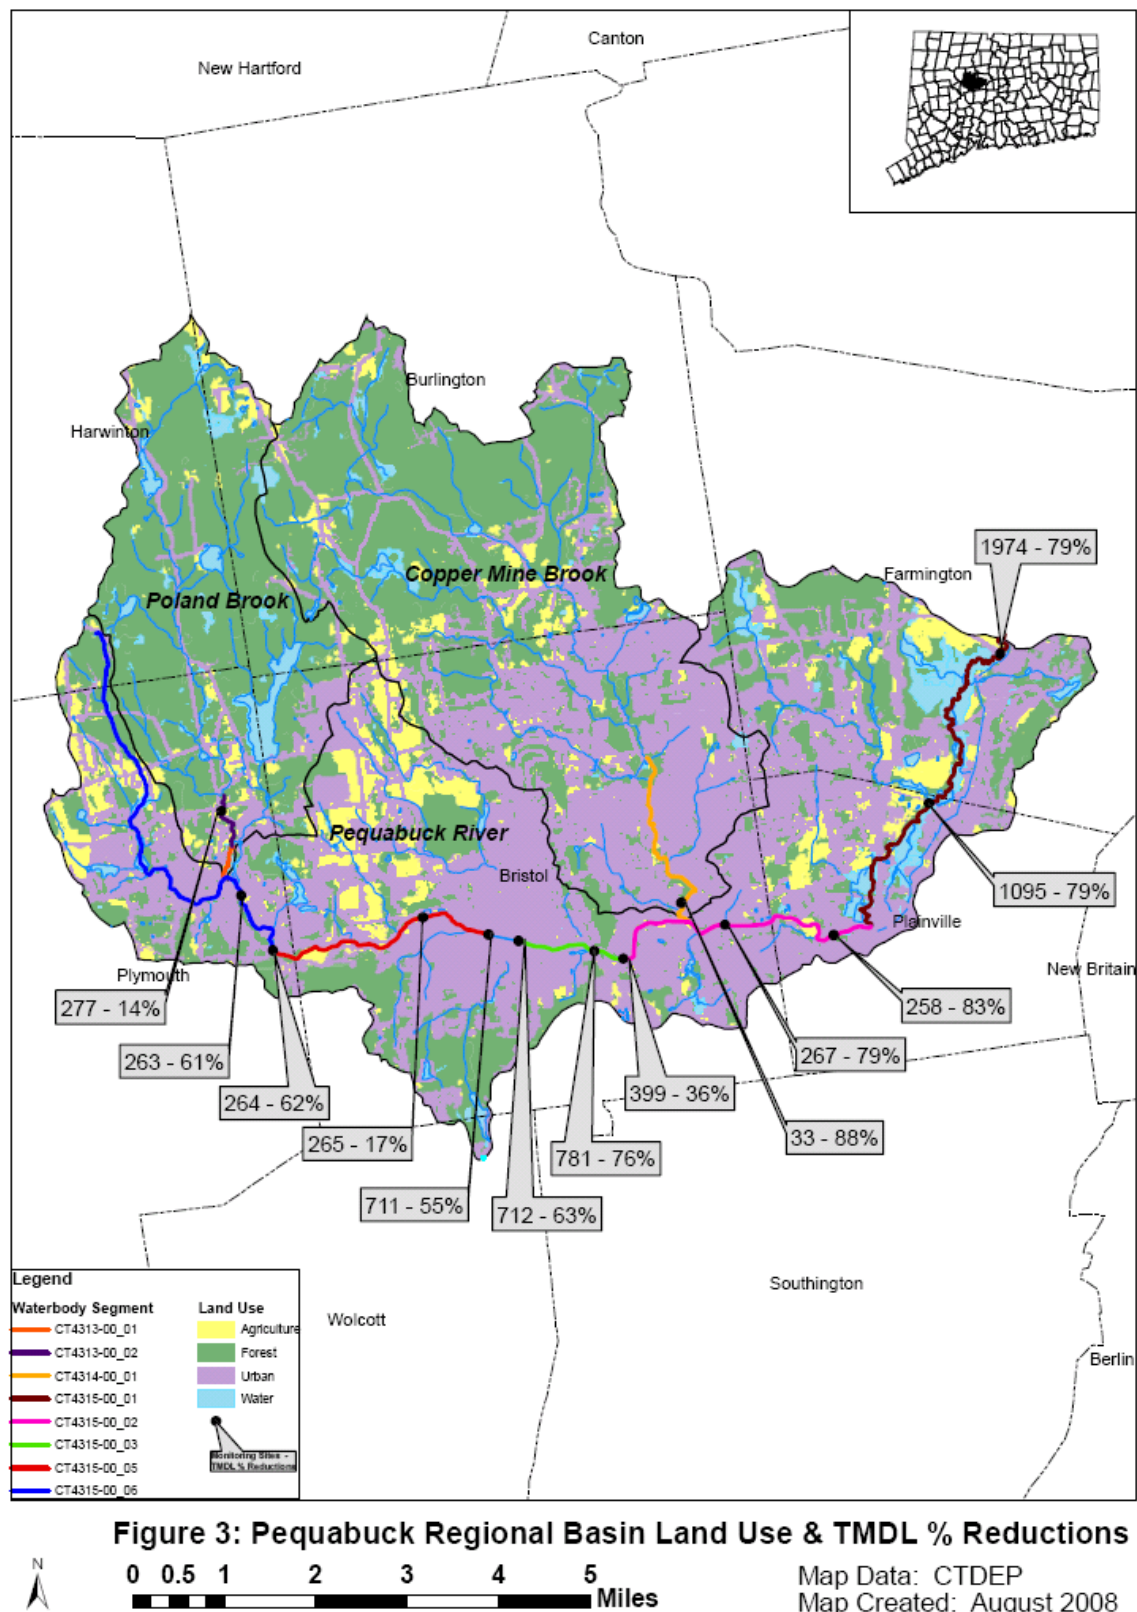

FINAL *E.coli* TMDL  
 Pequabuck River Sub-Regional Basin  
 September 29, 2009

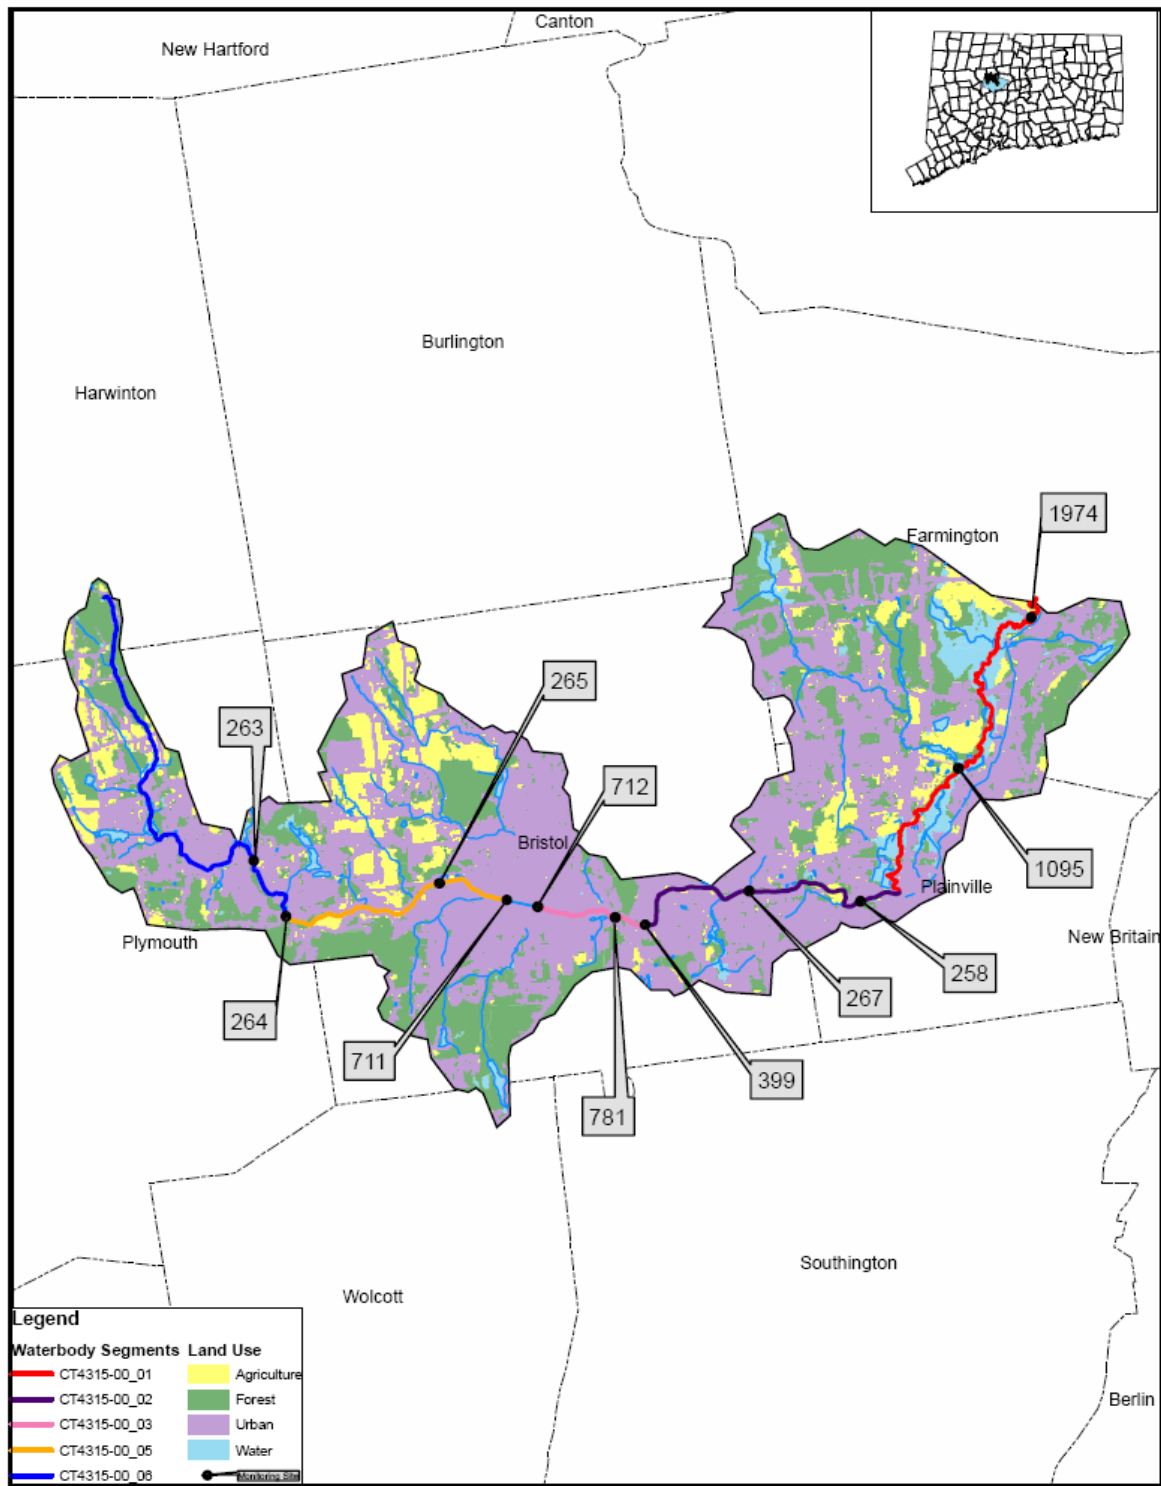


**Figure 4: Pequabuck River Subregional Basin Land Use**



0 0.5 1 2 3 4 5 Miles


Map Data: CTDEP  
Map Created: August 2008



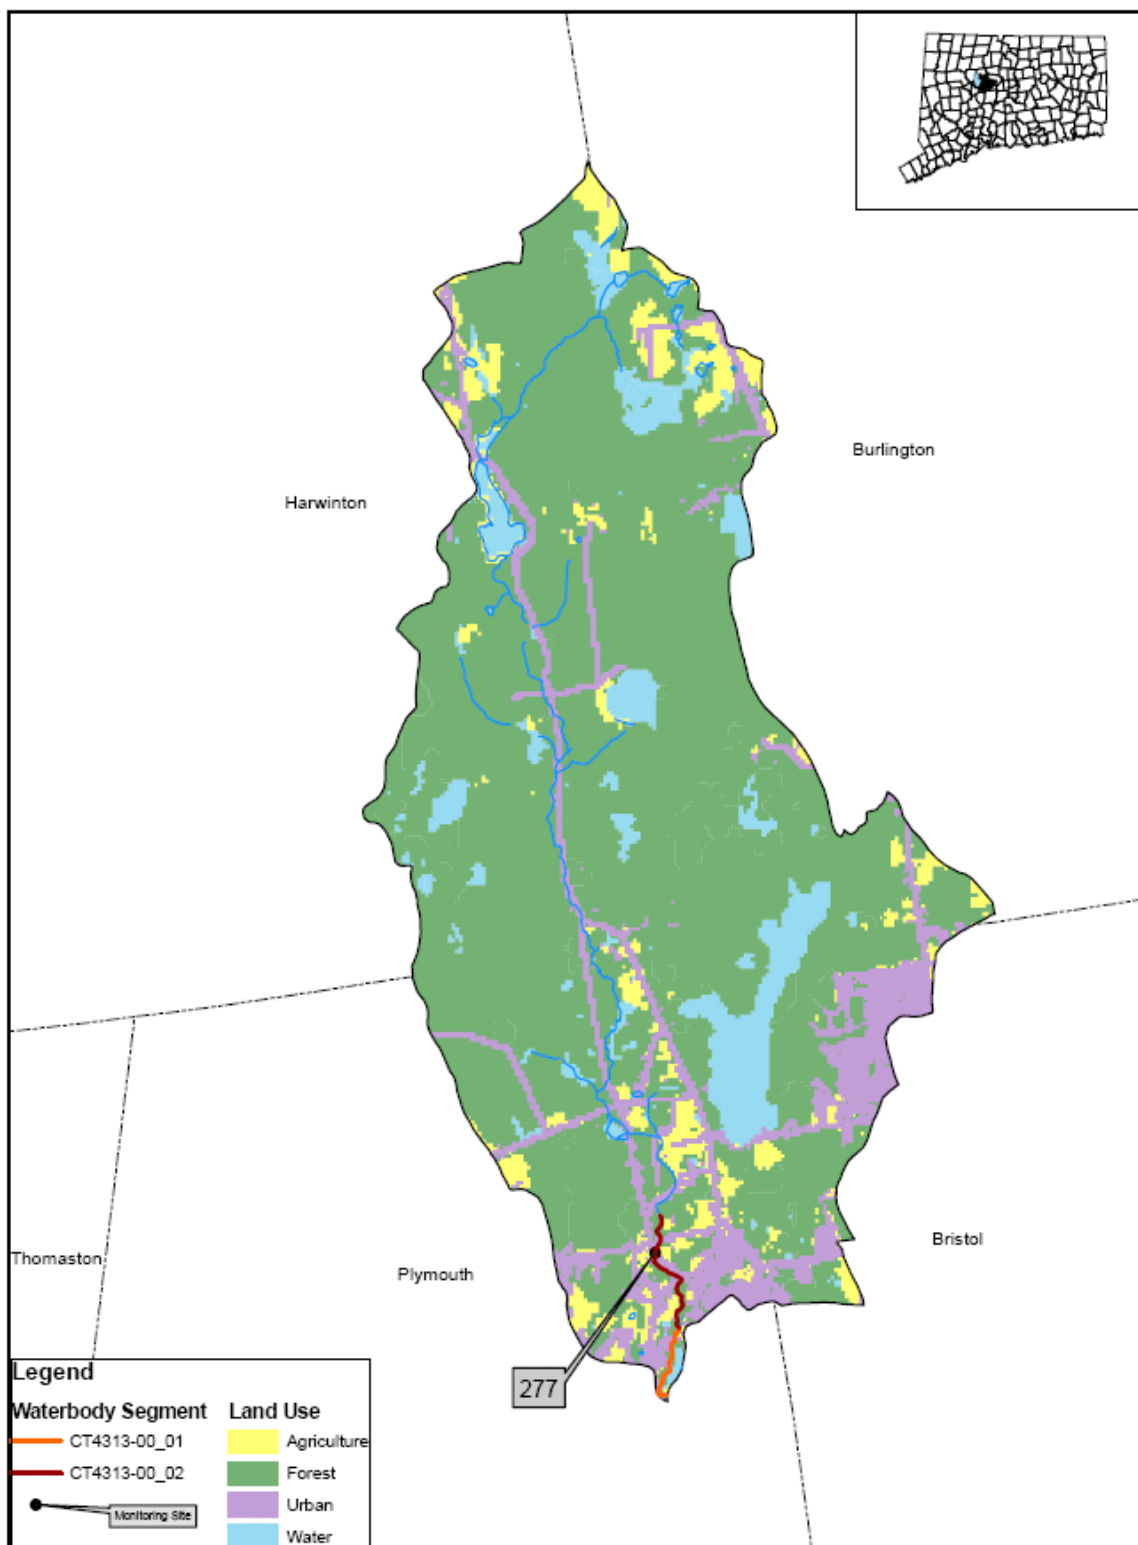

**Figure 5: Poland River Land Use**

Map Data: CTDEP  
Map Created: August 2008

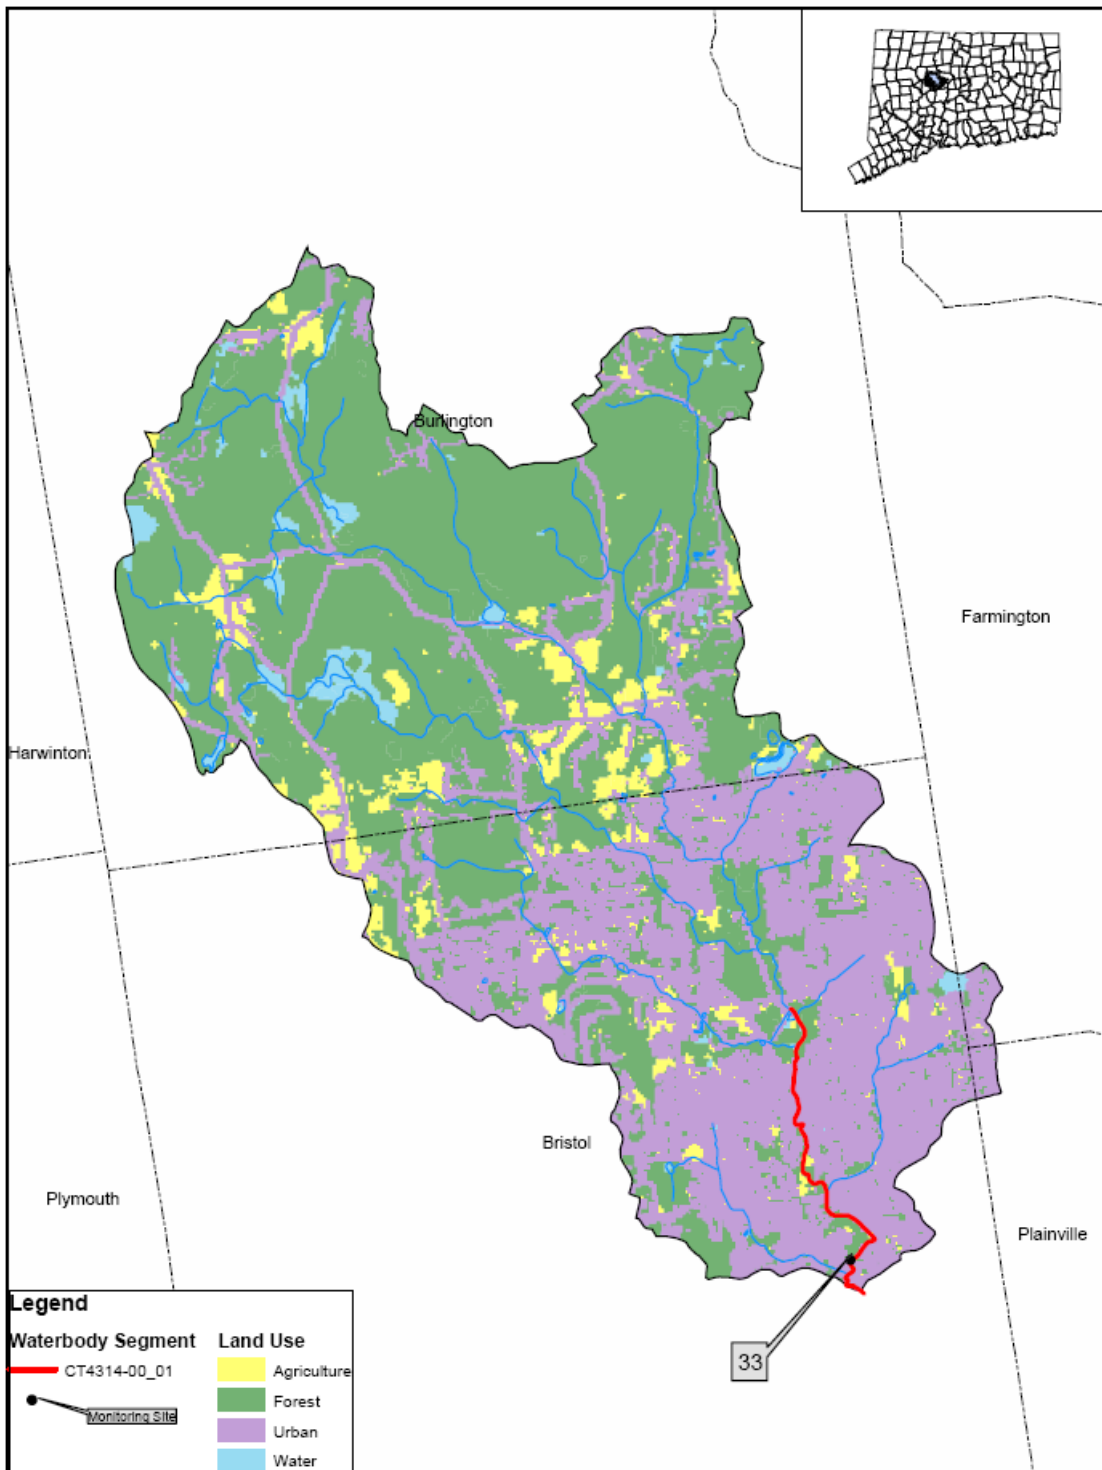

**Figure 6: Coppermine Brook Land Use**

Map Data: CTDEP  
Map Created: August 2008

## **Appendix A**

- A-1 Site Specific Information for Pequabuck River
- A-2 Site Specific Information for Coppermine Brook
- A-3 Site Specific Information for Poland River

**Appendix A-1  
Pequabuck River  
Waterbody Specific Information**

**Impaired Waterbody**

**Waterbody Name:** Pequabuck River

**Waterbody Segment ID:** CT 4315-00\_01, CT 4315-00\_02, CT 4315-00\_03, CT 4315-00\_04, CT 4315-00\_05, CT 4315-00\_06

**Waterbody Segment Description:** From mouth at Farmington River, Plainville upstream to headwaters South of Rocky Road, Harwinton

**Impairment Description:**

**Designated Use Impairment:** Recreation

**Size of Impaired Segment:** 18.46 linear miles

**Surface Water Classification:** Class C/B, B

**Watershed Description:**

**Total Regional Drainage Basin Area:** 18577 acres

**Tributary To:** Farmington River

**Subregional Basin Name & Code:** Pequabuck River, 4315

**Regional Basin:** Farmington River

**Major Basin:** Connecticut

**Watershed Towns:** Bristol, Burlington, Farmington, Harwinton, New Britain, Plainville, Plymouth, Wolcott

**Phase II GP applicable? :** Bristol - Y, Burlington – Y, Farmington – Y, Harwinton - N, New Britain – Y, Plainville - Y, Plymouth – Y, Wolcott – Y

**Applicable Season:** Recreation Season (May 1 to September 30)

**Landuse:**

Land Cover Category	Percent Composition
Forested	34% (6323 acres)
Urban/Developed	47% (8783 acres)
Water/Wetland	5.3% (978 acres)
Agriculture	13% (2493 acres)

**Data Source:** Connecticut Land Use Land Cover Data Layer LANDSTAT (2002) Thematic Mapper Satellite Imagery.



## **Appendix A-1 Pequabuck River TMDL Summary**

The TMDL analysis for the Pequabuck River was conducted at eleven sites, which are representative of five of six waterbody segments. Current data is unavailable to conduct a TMDL analysis for segment CT4315-00\_04 in the Pequabuck River. The section flows underground in downtown Bristol. However, this small segment (0.33 linear miles) is located in-between two segments that require reductions. There is also data generated from just upstream and just downstream of segment CT4315-00\_04 at site numbers 711 and 712 respectively. Therefore, it is reasonable to presume that the same percent reduction applies to the unlisted segment as the downstream site 712.

The analysis indicates that the sites are influenced by sources of bacteria active under both wet weather and dry weather conditions. The Waste Load Allocation (WLA) is applicable to regulated stormwater. Reduction in the WLA can be achieved through the detection and elimination of illicit discharges to the storm sewers, as well as the installation of engineered controls to reduce the surge of stormwater to the river, promote groundwater recharge, and improve water quality. Nonpoint sources, such as domestic animal waste, and wildlife may contribute to the Load Allocation (LA).

It is important to note that the percent reductions required at the site 399 in segment CT4315-00\_03 and site 265 in segment CT4315-00\_05 are significantly lower than other locations in the basin. Site 399 is the outfall of the Bristol WWTP and therefore should produce negligible bacteria loading during the disinfection season. Site 265 is located in a town park and may receive less of a stormwater surge during precipitation events due to adequate buffer zones within the park boundary. The furthest downstream sites (1974 and 1095) require the most significant reductions and this is likely a result of the Pequabuck flowing through long stretches of urban developed landscape, exposing the river to more significant stormwater runoff during precipitation events.

Table of Pequabuck Site Photos. Upstream through downstream (left to right, top to bottom)



Site 263 (furthest upstream location) Route 72 & route 6



Site 264 (Downstream of Canal Street)



Site 265 (Upper End of Rockwell Park Upstream of stone bridge)



Site 711 (Start of box culvert adjacent to route 72 Bristol)





Site 712 End of box culvert adjacent to route 72



Site 781 (Upstream of dam at route 229 and Memorial Blvd)



Site 399 (10m Downstream of Bristol WPCF outfall on Pine Street)



Site 267 (Adjacent to USGS gauge just upstream of Central Ave)





Site 258 (Downstream of route 177 in Plainville)



Site 1095 (Plainville @ Northwest Drive)



Site 1974 (Old USGS gauge location, @ Meadow Road, Land Trust walk)

## Waterbody Segment ID: CT4315-00 01


**Monitoring Site:** 1974, Site description: Meadow Road

Precipitation and E. coli data provided by the Bristol Water Company & <[www.wunderground.com](http://www.wunderground.com)> and CT DEP staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	81
Dry (LA)	78
Total (TMDL)	79

27


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 1974**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

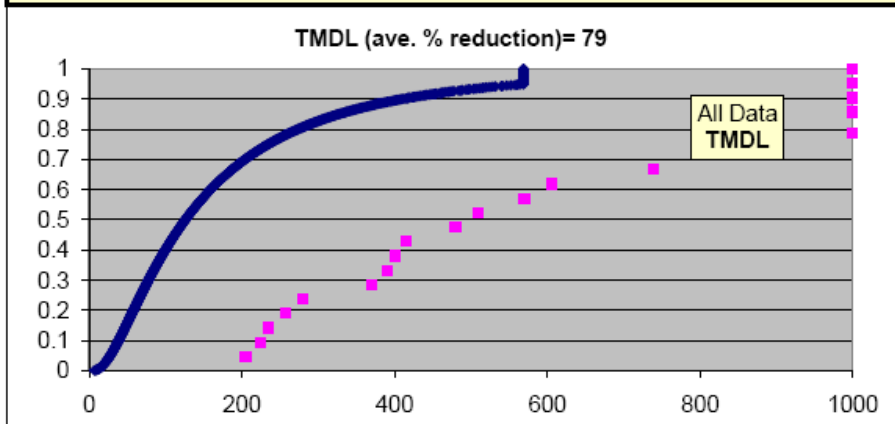

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

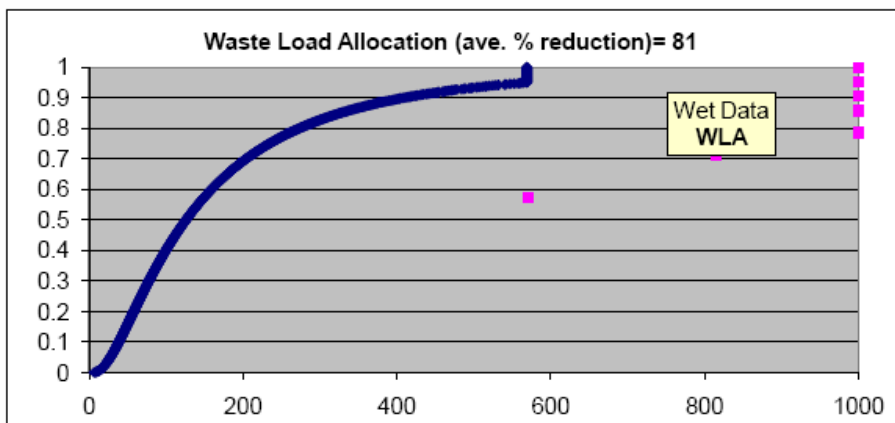

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

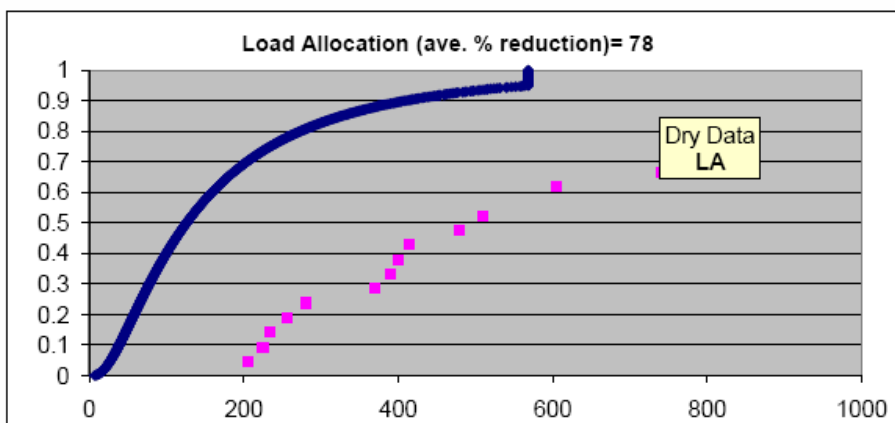

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

## Waterbody Segment ID: CT4315-00\_01


**Monitoring Site:** 1095, Site description:Northwest Drive

Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP staff respectively.  
**WET** condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	81
Dry (LA)	78
Total (TMDL)	79

29


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 1095**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

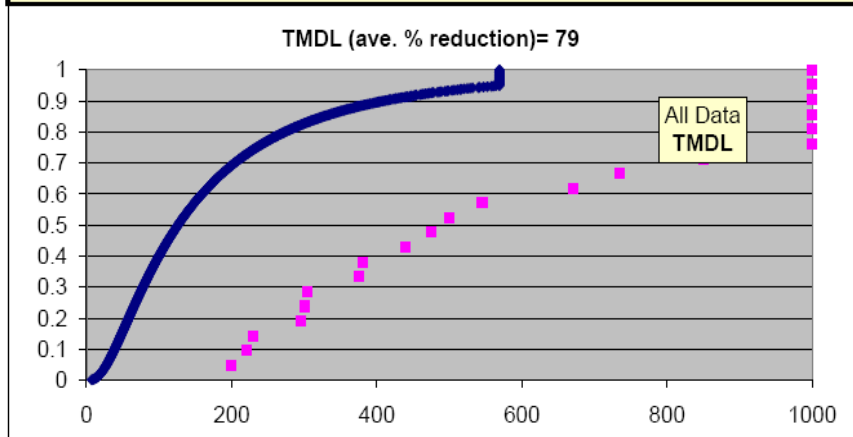

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

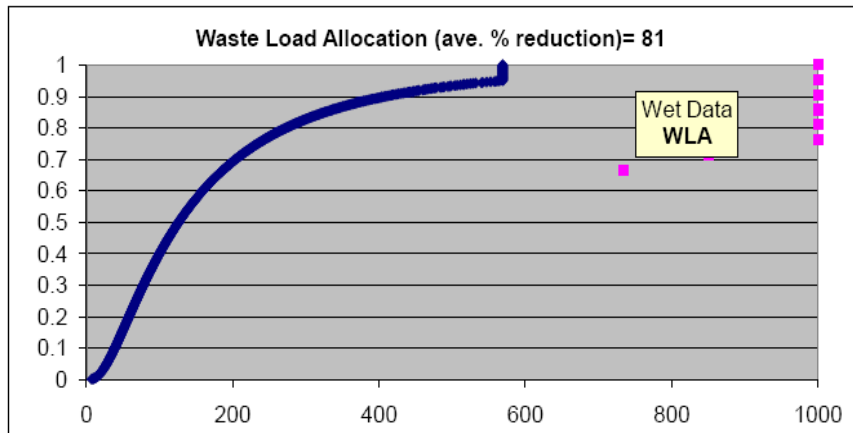

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

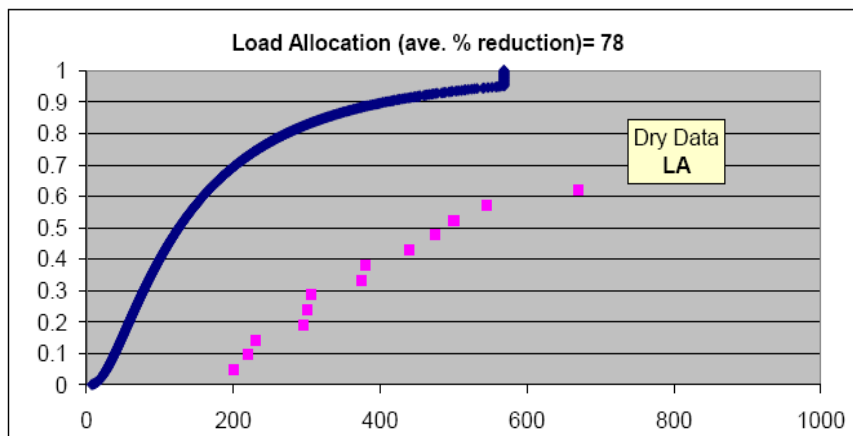

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.



## Waterbody Segment ID: CT4315-00 02


**Monitoring Site:** 258, Site description: Downstream of Route 177

Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	85
Dry (LA)	82
Total (TMDL)	83

31


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 258**  
**y axis = cumulative frequency; x axis = *E.coli* (col/100mL)**

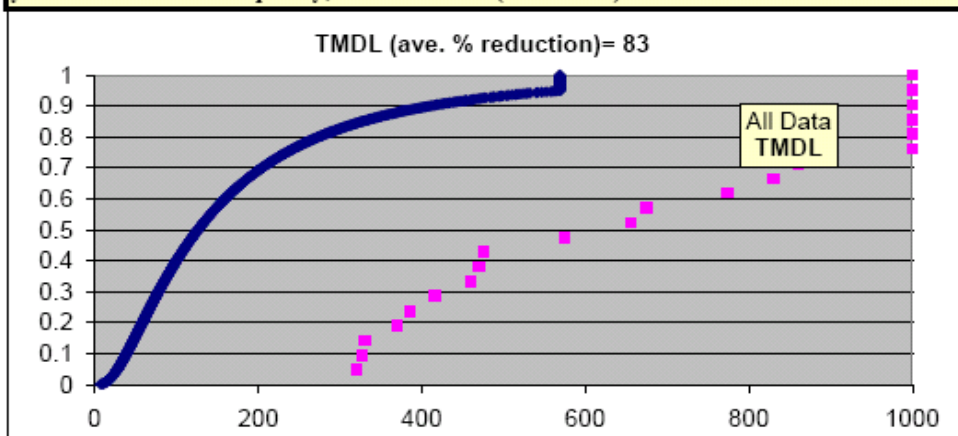

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

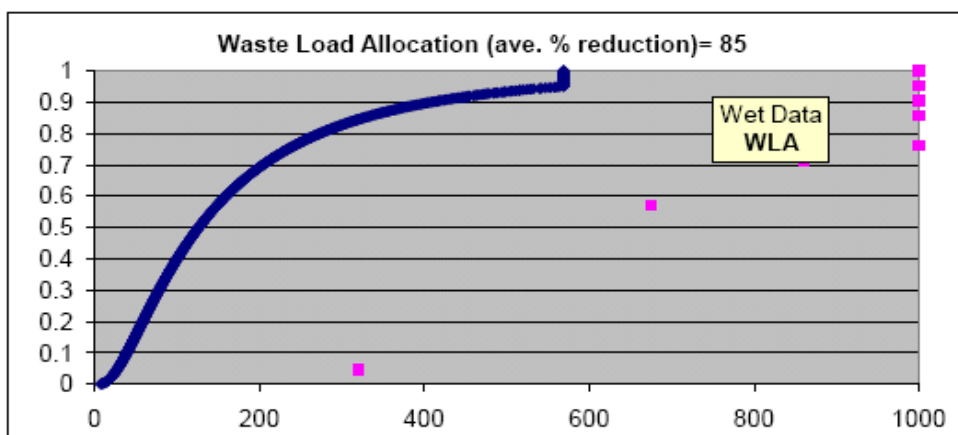

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

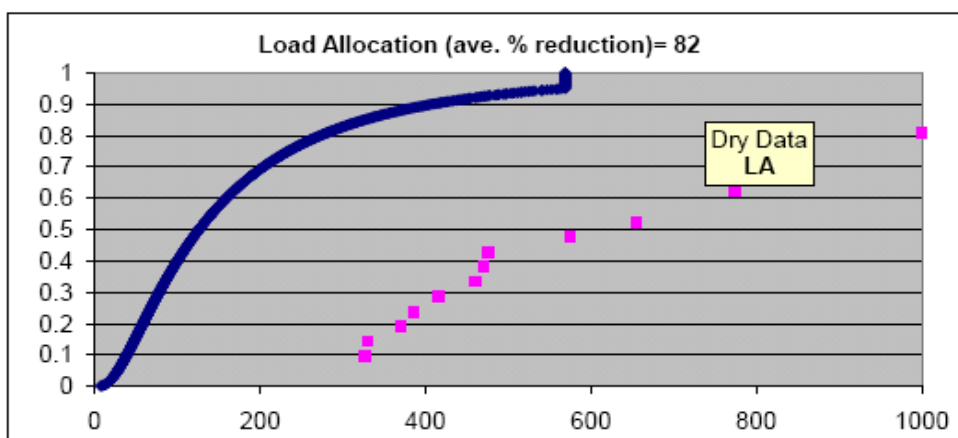

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.


## Waterbody Segment ID: CT4315-00 02

**Monitoring Site:** 267, Site description: USGS Gauge Upstream of Central Avenue

Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.

# Samples DRY	13
# Samples WET	8
# Samples Total	21
Geomean	712
Log std deviation	0.5154
<u>Avg % Reduction</u>	
Wet (WLA)	83
Dry (LA)	77
Total (TMDL)	79


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 267**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

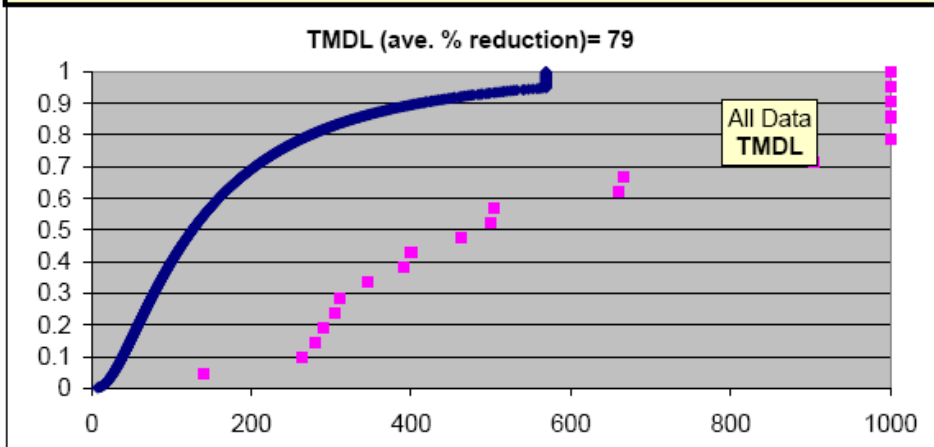

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.



Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

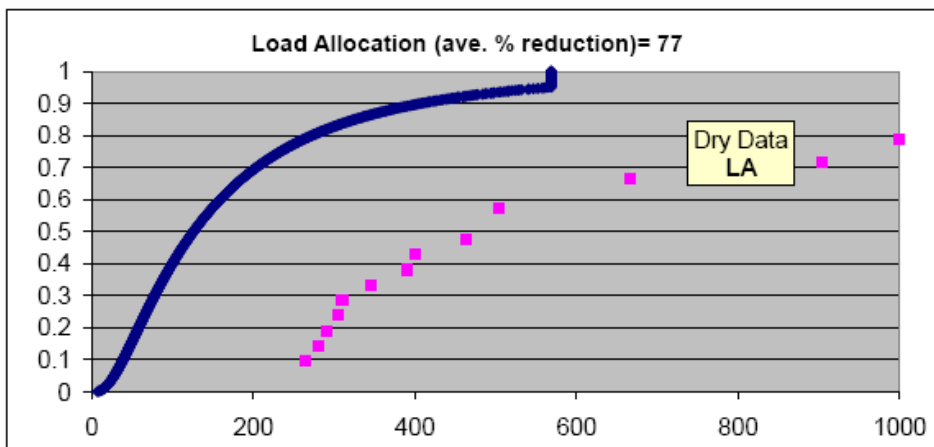

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

## Waterbody Segment ID: CT4315-00\_03


**Monitoring Site:** 399, Site description: Bristol STP outfall

Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	19
Dry (LA)	46
Total (TMDL)	36

35


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 399**  
**y axis = cumulative frequency; x axis = *E.coli* (col/100mL)**

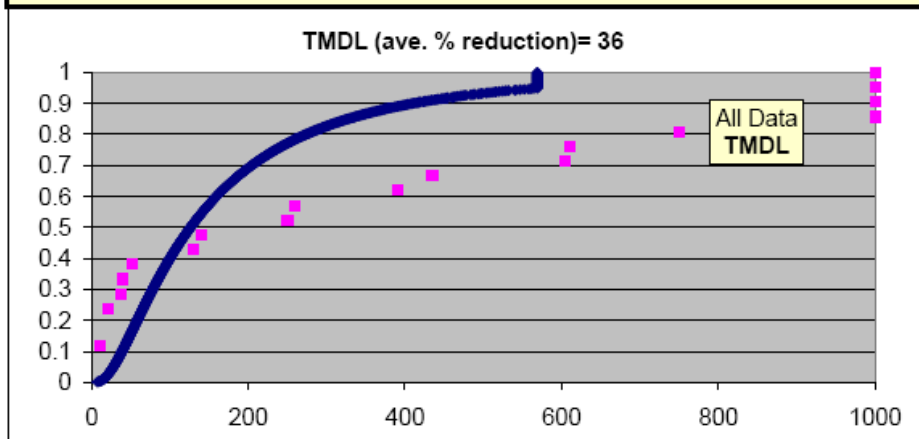

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

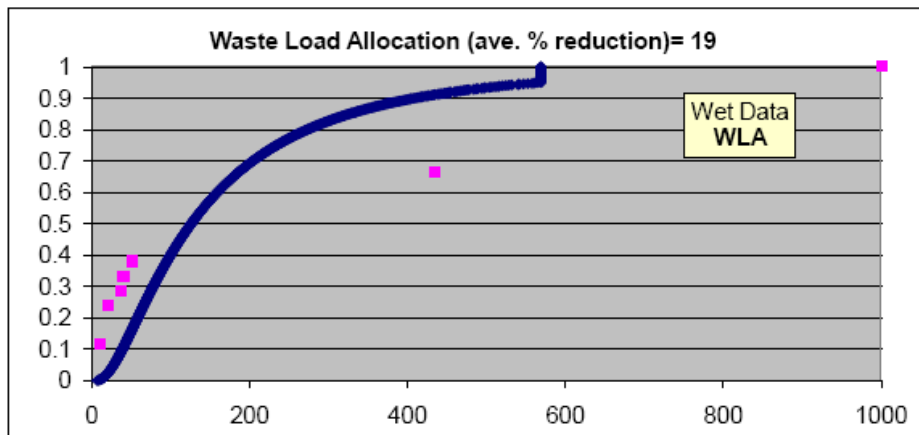

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

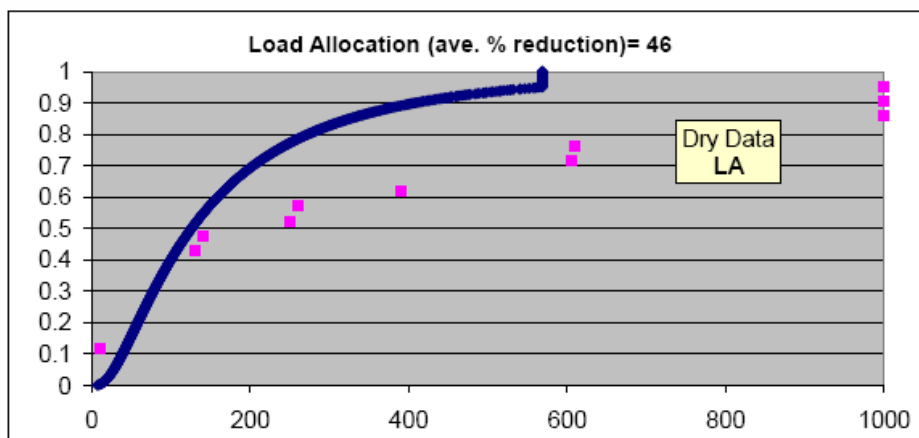

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

## Waterbody Segment ID: CT4315-00\_03


**Monitoring Site:** 781, Site description: Dam at Route 229 and Memorial Boulevard

Precipitation and E. coli data provided by the Bristol Water Company and <www.wunderground.com> and CT DEP Staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	78
Dry (LA)	75
Total (TMDL)	76

37


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 781**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

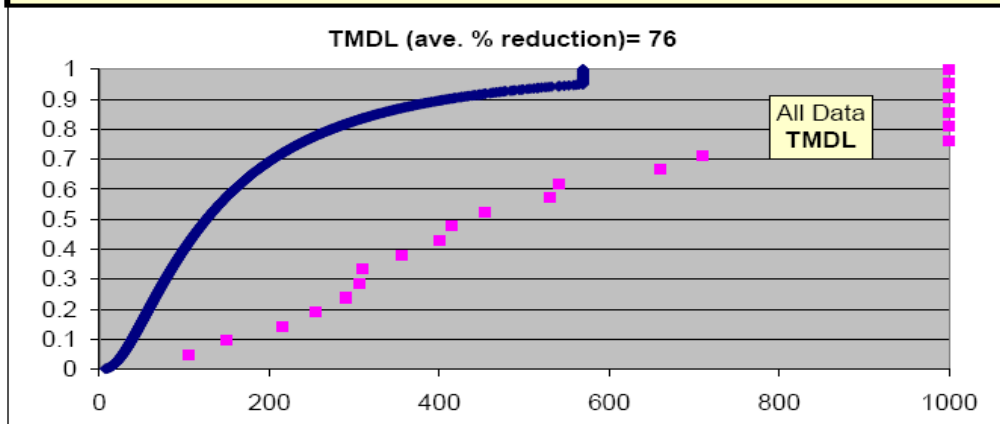

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

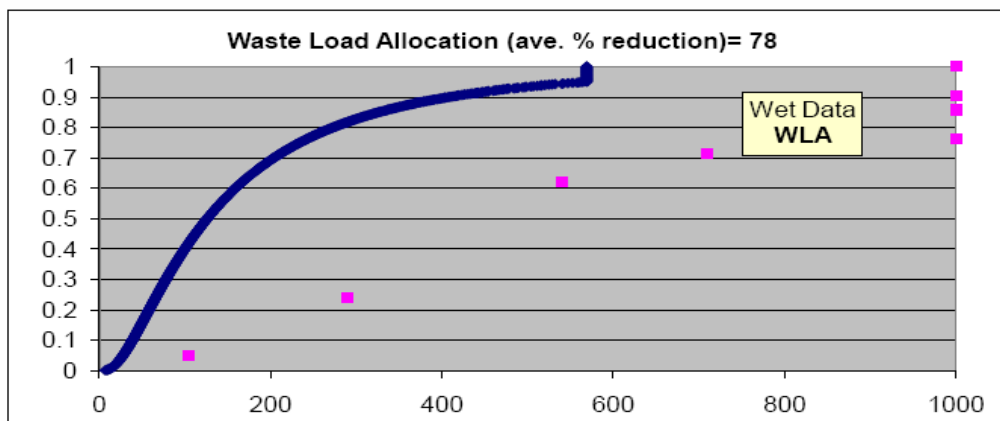

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

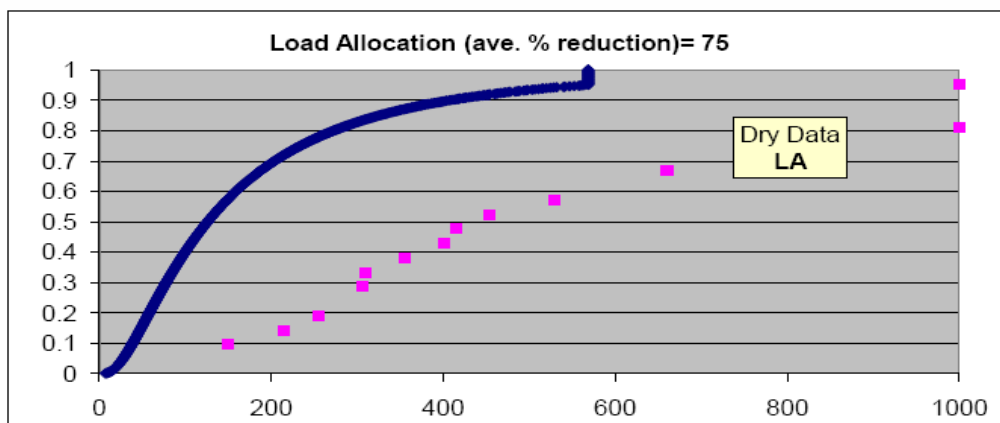

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.




## Waterbody Segment ID: CT4315-00 03

**Monitoring Site:** 712. Site description: end of box culvert adjacent to Route 72


Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
WET Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.

Wet (WLA)	61
Dry (LA)	64
Total (TMDL)	63


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 712**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

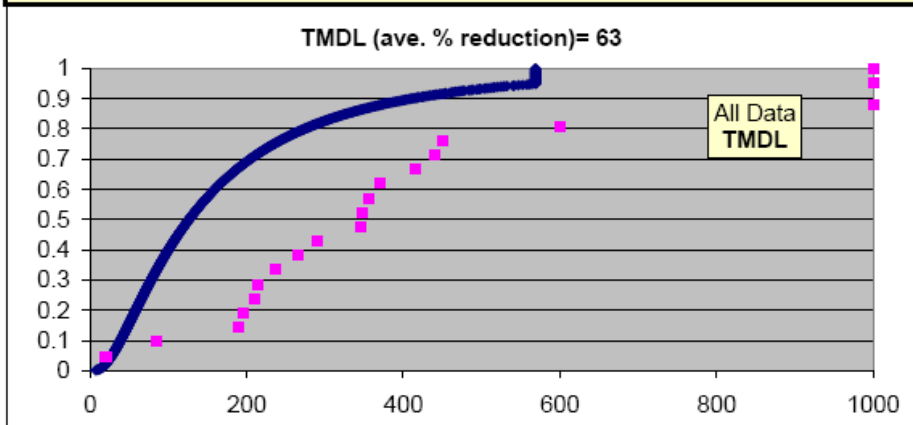

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

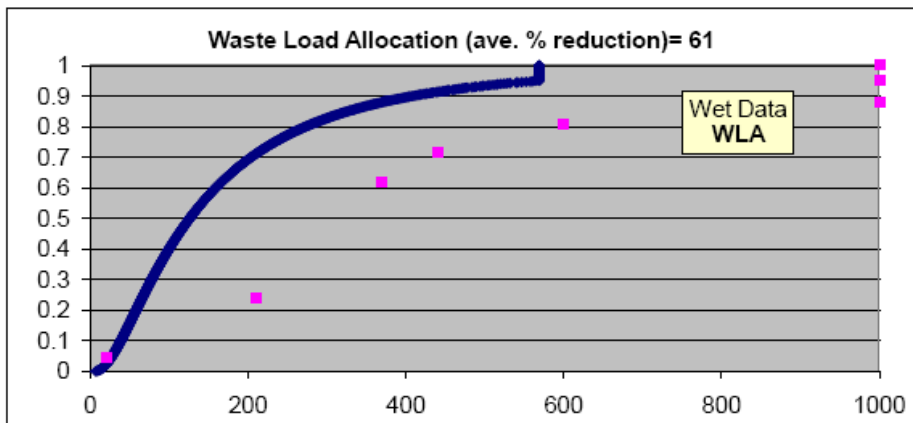

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

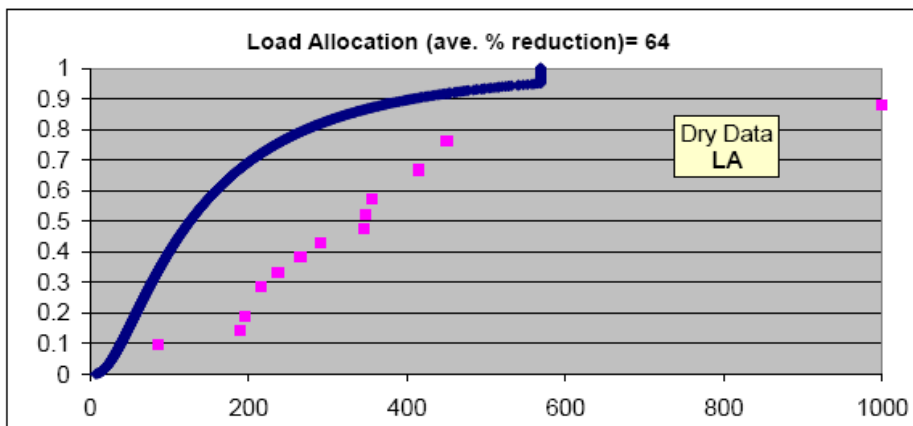

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.


## Waterbody Segment ID: CT4315-00\_05

**Monitoring Site:** 711, Site description: Top of box culvert at Route 72


Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
WET Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.

Wet (WLA)	56
Dry (LA)	54
Total (TMDL)	55


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 711**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

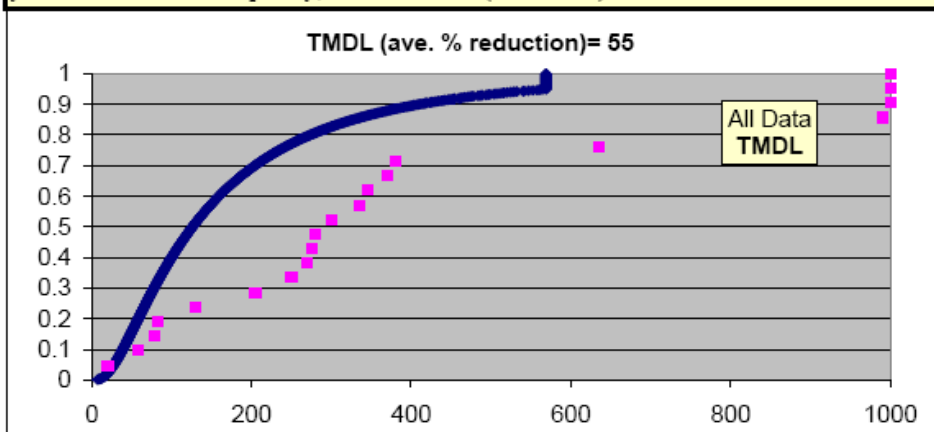

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

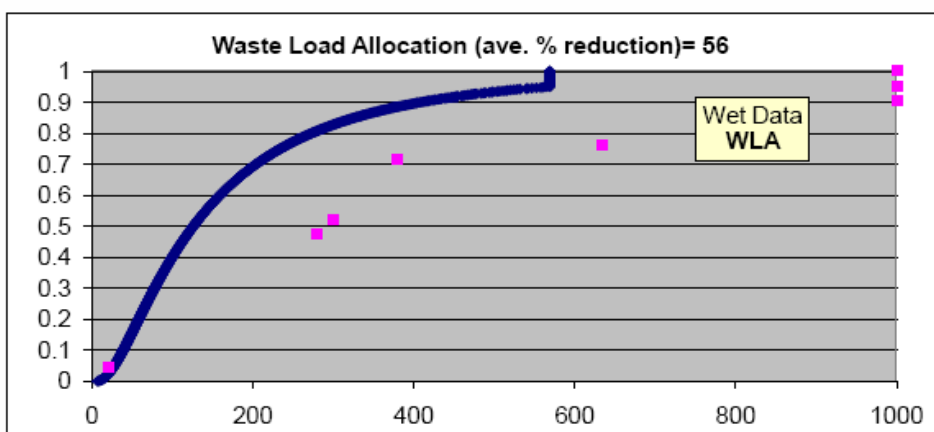

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

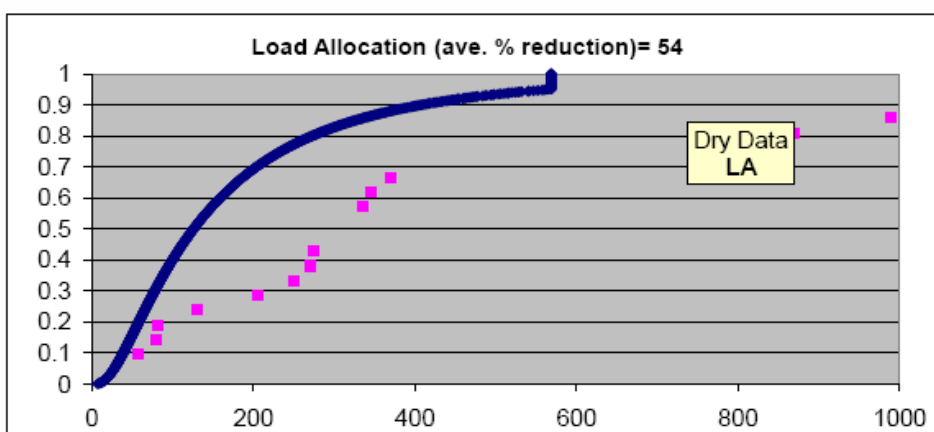

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.


## Waterbody Segment ID: CT4315-00\_05

**Monitoring Site:** 265, Site description: Rockwell Park


Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.

Wet (WLA)	39
Dry (LA)	4
Total (TMDL)	17


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 265**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

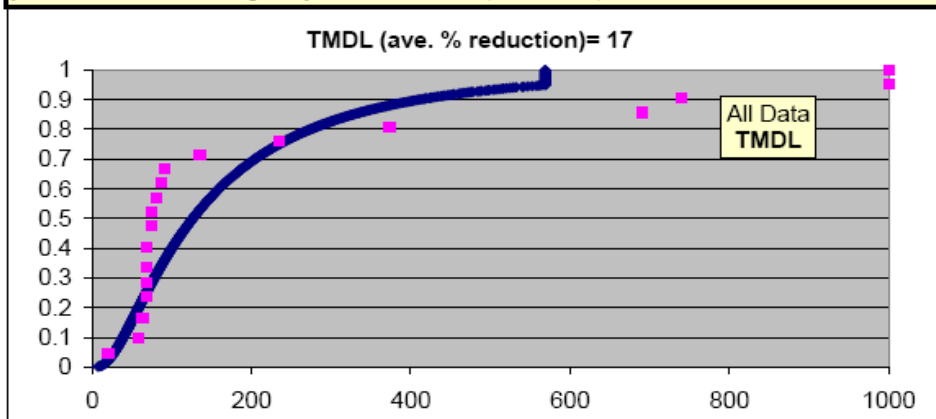

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

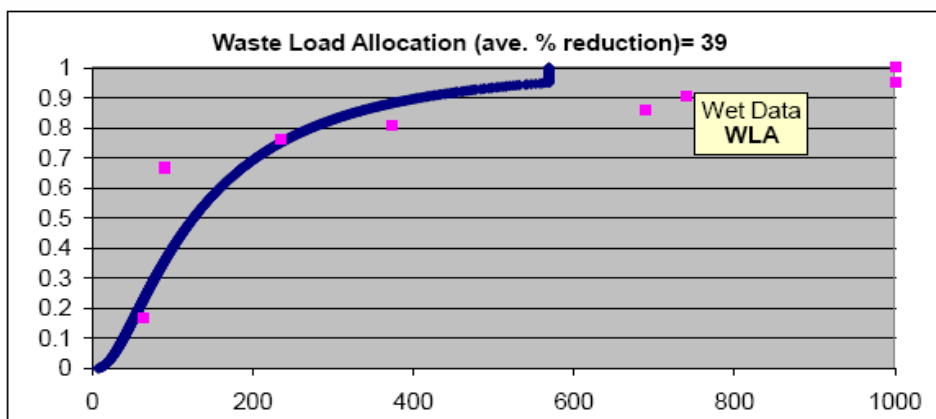

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

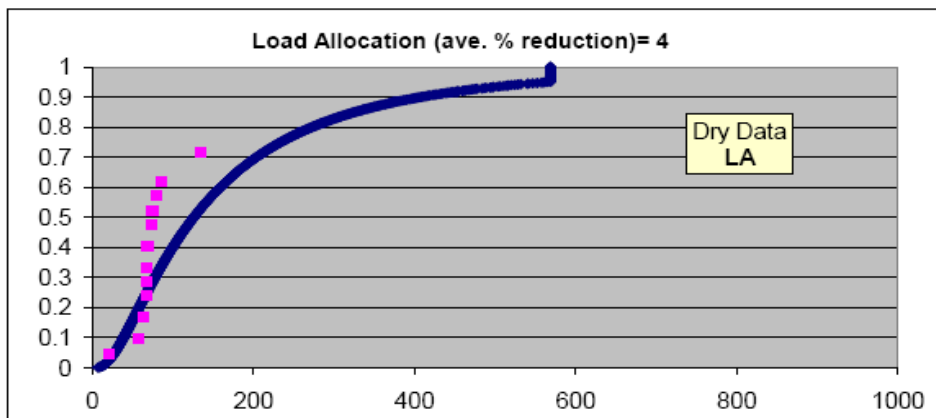

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

## Waterbody Segment ID: CT4315-00\_06

**Monitoring Site:** 264, Site description: Canal Street


Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
WET Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.

Wet (WLA)	71
Dry (LA)	56
Total (TMDL)	62


45




**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 264**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

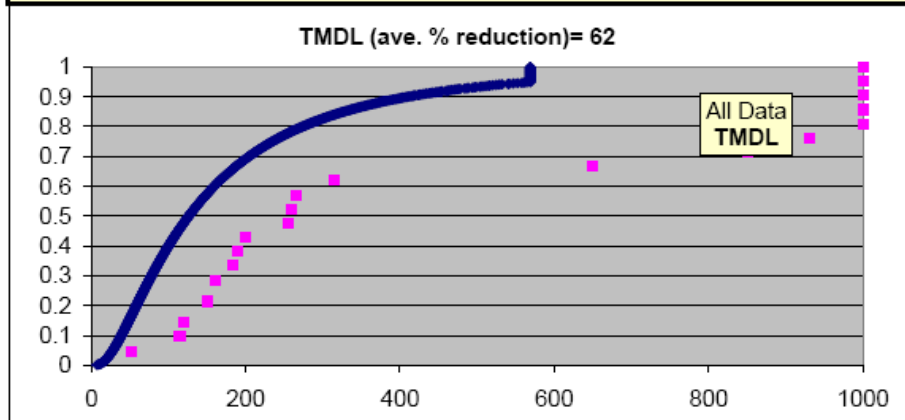

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

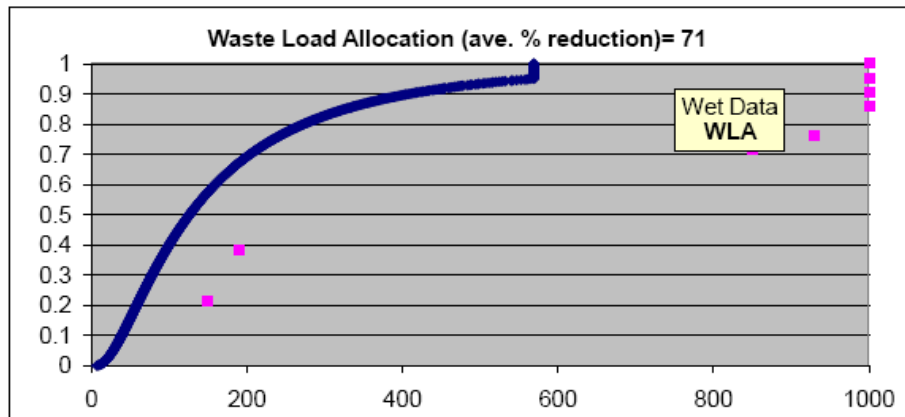

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

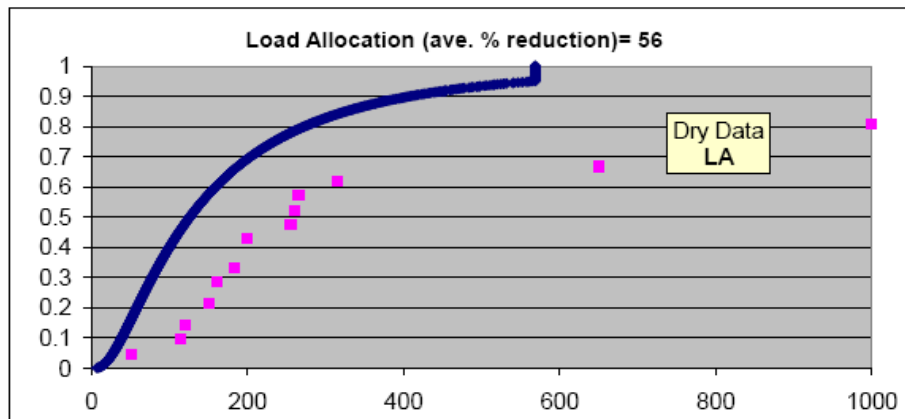

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

## Waterbody Segment ID: CT4315-00\_06


**Monitoring Site:** 263, Site description: Route 72 and Route 6 intersection

Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP Staff respectively.  
WET Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	68
Dry (LA)	57
Total (TMDL)	61

47


**Waterbody Name: Pequabuck River Criteria Curve for Monitoring Site 263**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

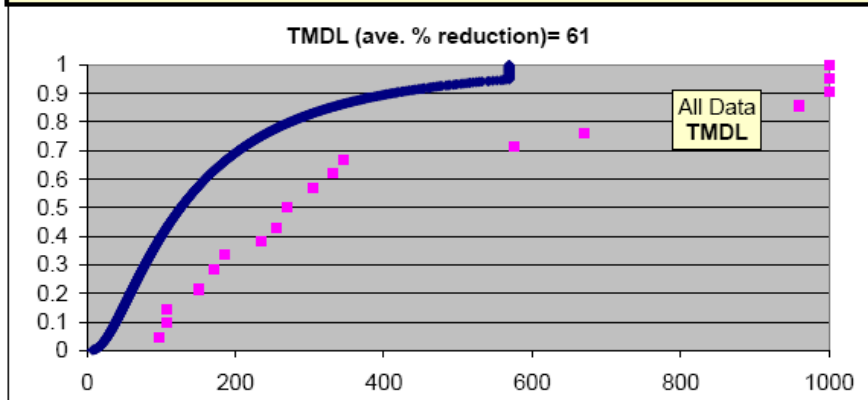

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

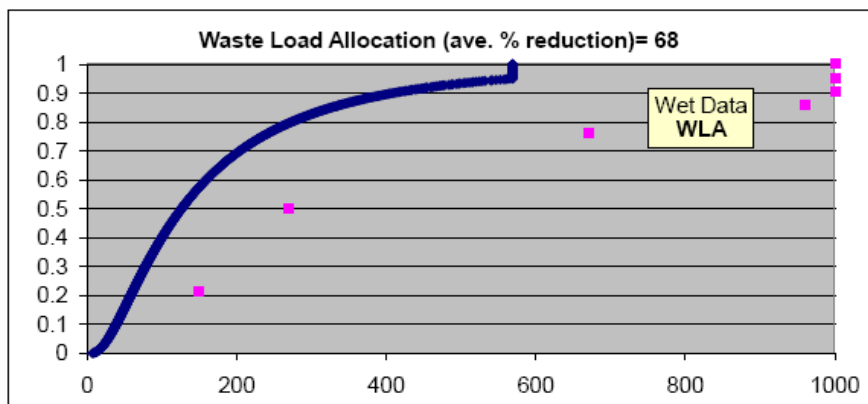

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

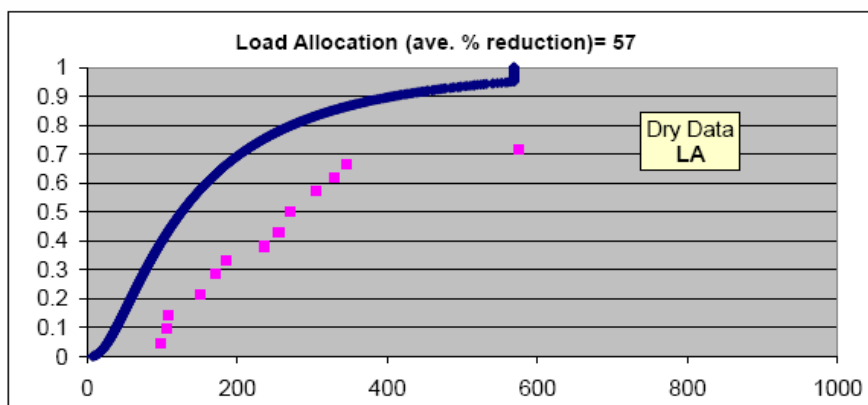

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

**Appendix A-2**  
**Coppermine Brook**  
**Waterbody specific information**

**Impaired Waterbody**

**Waterbody Name:** Coppermine Brook

**Waterbody Segment IDs:** CT 4314-00\_01

**Waterbody Segment Description:** From mouth at Pequabuck River, upstream to New Britain drinking water watershed boundary and water diversion (just upstream of confluence with Polkville Brook), Bristol.

**Impairment Description:**

**Designated Use Impairment:** Recreation

**Size of Impaired Segments:** 2.43 linear miles

**Surface Water Classification:** Class A

**Watershed Description:**

**Drainage Basin Area:** 11916.16 acres

**Tributary To:** Pequabuck River

**Subregional Basin Name & Code:** Coppermine Brook, 4314

**Regional Basin:** Farmington River

**Major Basin:** Connecticut

**Watershed Towns:** Bristol, Burlington

**Phase II GP applicable?** Bristol- Y, Burlington-Y

**Applicable Season:** Recreation Season (May 1 to September 30)

**Landuse:**

Land Cover Category	Percent Composition
Forested	57% (6789 acres)
Urban/Developed	34% (4108 acres)
Water/Wetland	2% (283 acres)
Agriculture	6% (734 acres)

**Data Source:** Connecticut Land Use Land Cover Data Layer LANDSTAT (2002) Thematic Mapper Satellite Imagery.

## Appendix A-2

### Coppermine Brook TMDL Summary

The TMDL analysis for Coppermine Brook was conducted at one site (33), which is within 250 meters of the confluence with the Pequabuck River. This site is located in segment CT4314-00\_01 which is the furthest downstream and more urban stretch of the brook. The TMDL analysis indicates that the site is influenced by sources of bacteria active under both wet weather and dry weather conditions. The Waste Load Allocation (WLA) reduction (89%) is slightly higher than the Load Allocation (LA) reduction (87%) on this segment. The higher WLA value indicates that the stream is more influenced by point sources of *e.coli* and stormwater. Reductions in the WLA can be achieved through the detection and elimination of illicit discharges to the storm sewers or directly to the brook and the upgrade of failed sanitary infrastructure, as well as, the installation of engineered controls to reduce the surge of stormwater to the brook, promote groundwater recharge, and improve water quality. Since illicit discharges and failed sanitary collection systems may also be active under dry conditions, it is likely that corrective actions aimed at eliminating these sources will also reduce the Load Allocation (LA). Other contributors to the LA include as domestic animal waste, wildlife, and stormwater input as sheet flow.

Table of Coppermine Brook Images.



Site 33 (West Washington Street in Bristol)


## Waterbody Segment ID: CT4314-00\_01

**Monitoring Site:** 33, Site description: Upstream of West Washington Street


Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.

# Samples DRY	14
# Samples WET	9
# Samples Total	23
Geomean	1145
Log std deviation	0.4670
<u>Avg % Reduction</u>	
Wet (WLA)	89
Dry (LA)	87
Total (TMDL)	88


**Waterbody Name: Coppermine Brook Criteria Curve for Monitoring Site 33**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

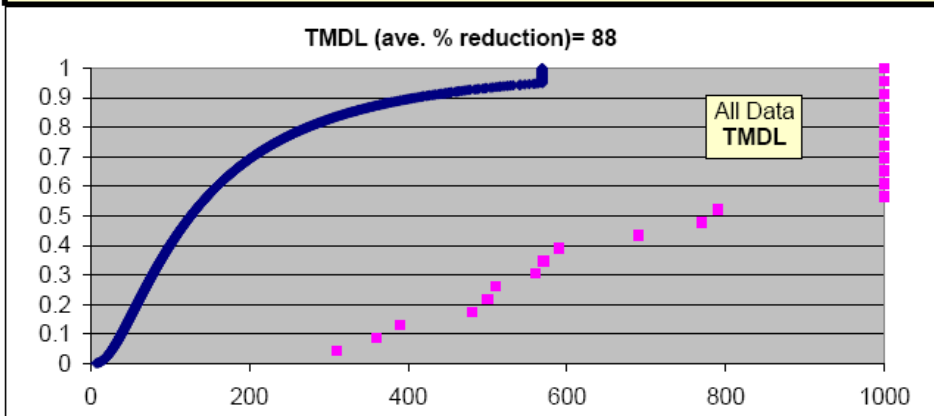

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

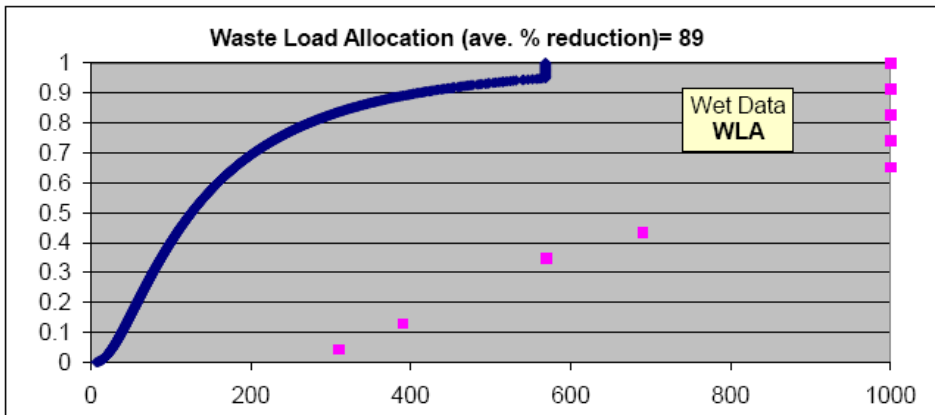

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

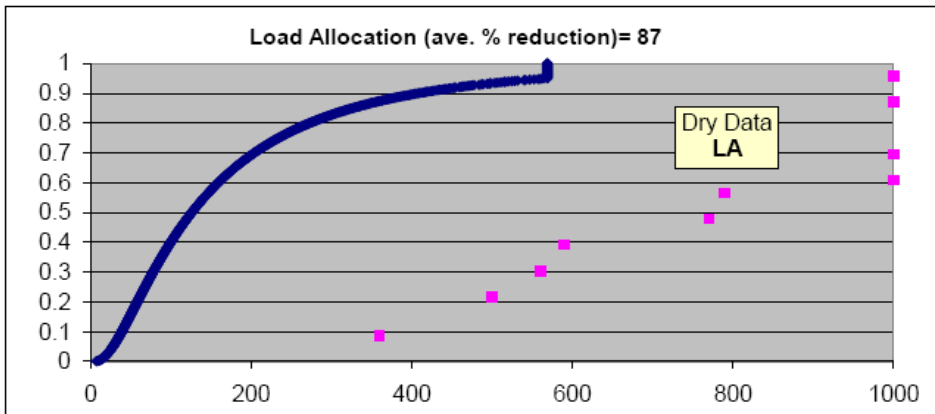

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.



**Appendix A-3**  
**Poland River**  
**Waterbody specific information**

**Impaired Waterbody**

**Waterbody Name:** Poland River

**Waterbody Segment IDs:** CT4313-00\_01, CT4313-00\_02

**Waterbody Segment Description:** From confluence with Pequabuck River to the confluence with Marsh Brook, upstream to confluence with unnamed Brook 4313-03\_01, upstream of Judd Road crossing (parallel with route 72), Plymouth, CT.

**Impairment Description:**

**Designated Use Impairment:** Recreation

**Size of Impaired Segments:** 0.71 linear miles (CT4313-00\_02)  
0.47 linear miles (CT4313-00\_01)

**Surface Water Classification:** Class A

**Watershed Description:**

**Drainage Basin Area:** 6482.559 acres

**Tributary To:** Pequabuck River

**Subregional Basin Name & Code:** Poland River, 4313

**Regional Basin:** Farmington River

**Major Basin:** Connecticut

**Watershed Towns:** Burlington, Harwinton, Plymouth

**Phase II GP applicable?** Burlington-Y, Harwinton-N, Plymouth-Y

**Applicable Season:** Recreation Season (May 1 to September 30)

**Landuse:**

Land Cover Category	Percent Composition
Forested	75% (4859 acres)
Urban/Developed	10% (668 acres)
Water/Wetland	8% (533 acres)
Agriculture	7% (421 acres)


**Data Source:** Connecticut Land Use Land Cover Data Layer LANDSTAT (2002) Thematic Mapper Satellite Imagery.

### **Appendix A-3 Poland River TMDL Summary**

The TMDL analysis for Poland River was conducted at one site (277), which is representative of its waterbody segment. Current data is unavailable to conduct a TMDL analysis for segment CT4313-00\_01 in the Poland River. This section flows directly downstream of monitored section CT4313-00\_02, and to the confluence with the Pequabuck River. CT4313-00\_01 is a small segment (0.42 linear miles) and is located downstream of a section that requires reductions. The landuse of both segments is similar; therefore, it is reasonable to presume that the same percent reductions apply to the unlisted segment as segment CT4313-00\_02 at the upstream site 277.

The TMDL analysis indicates that the site is influenced by sources of bacteria active under both wet weather and dry weather conditions. The Waste Load Allocation (WLA) (17%) was higher than the Load Allocation (LA) (12%). This indicates that this waterbody segment is more strongly influenced by point source stormwater than nonpoint sources. Reduction in WLA can be achieved through the installation of engineered controls to reduce the surge of stormwater to the brook, promote groundwater recharge, and improve water quality, as well as, detection and elimination of illicit discharges to the storm sewers. Nonpoint sources, such as domestic animal waste and nuisance wildlife may contribute to the LA.

Table of Poland River monitoring site image

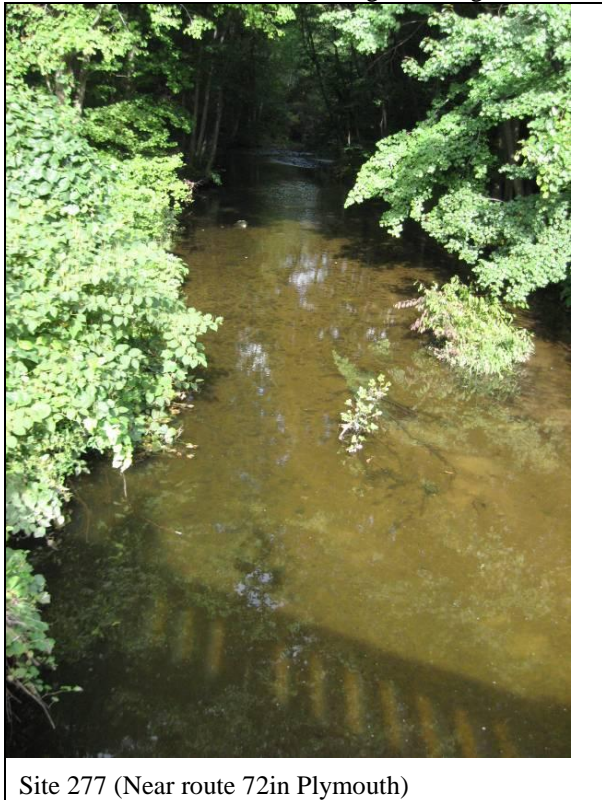

Site 277 (Near route 72in Plymouth)

Waterbody Segment ID: CT4313-00\_02


**Monitoring Site:** 277, Site description: Upstream of Route 72

Precipitation and E. coli data provided by the Bristol Water Company and <[www.wunderground.com](http://www.wunderground.com)> and CT DEP staff respectively.  
**WET** Condition defined as greater than 0.1" precipitation in 24 hours or 0.25" precipitation in 48 hours, or 2.0" precipitation in 96 hours.


Wet (WLA)	17
Dry (LA)	12
Total (TMDL)	14

55


**Waterbody Name: Poland River Criteria Curve for Monitoring Site 277**  
y axis = cumulative frequency; x axis = *E.coli* (col/100mL)

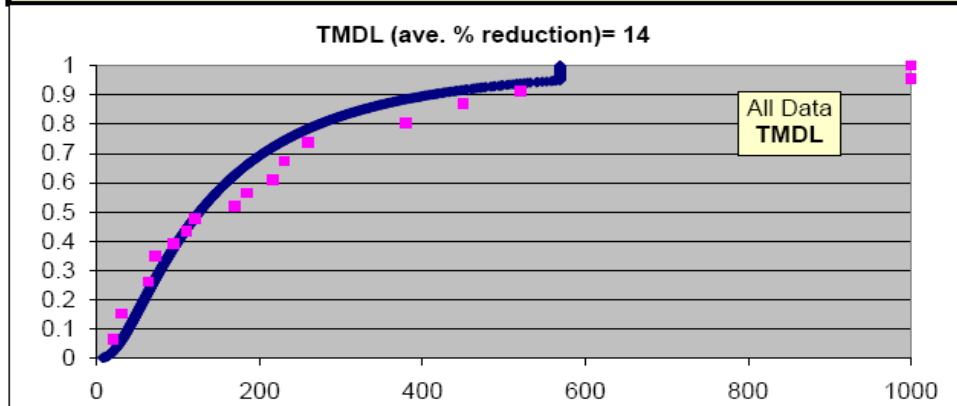

TMDL needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry and wet weather data.

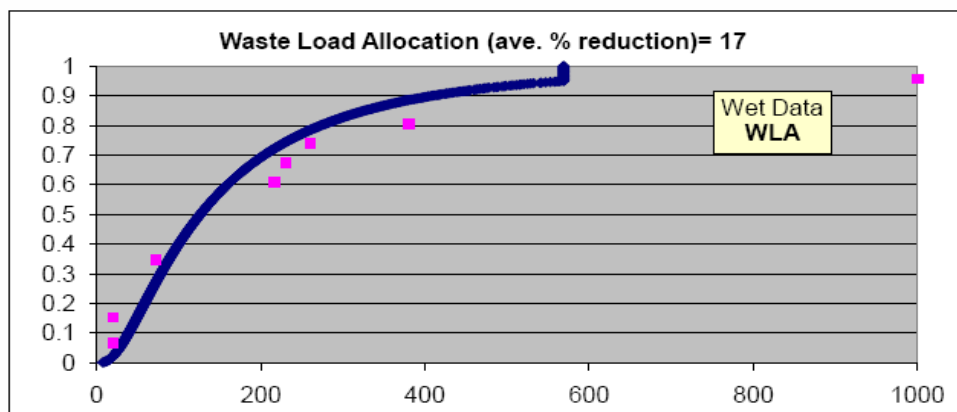

Waste Load Allocation (WLA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on wet weather data.

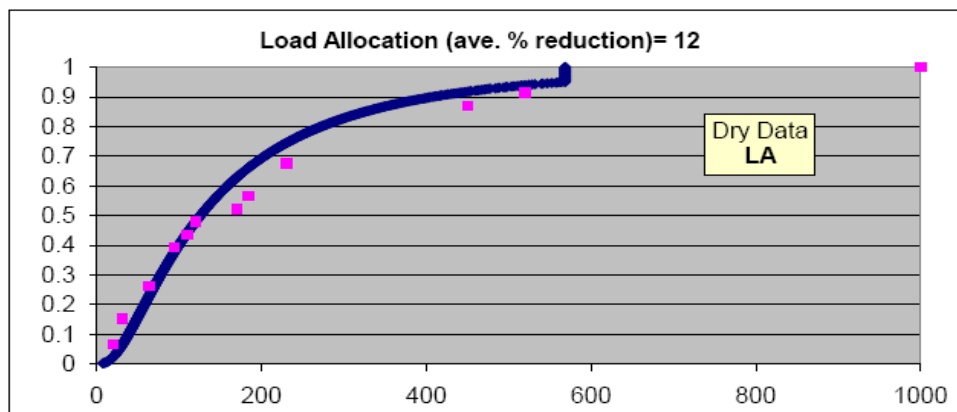

Load Allocation (LA) needed from current condition (magenta squares) to meet criteria (blue line). Current condition based on dry weather data.

## **Appendix B. Municipal Stormwater Alternative Monitoring Guidance**

## **Guidance for Implementing Bacteria-based TMDLs within the CTDEP Stormwater Permitting Program**

CTDEP investigates impaired waterbodies to determine the major causes of impairment. This information is expressed as Total Maximum Daily Load (TMDL). TMDLs provide the framework for restoring impaired waters by establishing the maximum amount of a pollutant that a waterbody can take in without adverse impact to fish, wildlife, recreation, or other public uses. If a TMDL includes requirements for control of stormwater discharges it is the responsibility of the municipalities within the watershed to implement the recommendations of the TMDL (typically bacteria reduction). Management of stormwater quality within the municipality is governed by the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4 General Permit).

The MS4 General Permit is required for any municipality with urbanized areas that initiates, creates, originates or maintains any discharge of stormwater from a storm sewer system to waters of the state. The MS4 permit requires towns to design a Stormwater Management Plan (SMP) to reduce the discharge of pollutants in stormwater to improve water quality. The plan must address the following 6 minimum measures.

1. Public Education and Outreach.
2. Public Involvement/Participation.
3. Illicit discharge detection and elimination.
4. Construction site stormwater runoff control.
5. Post-construction stormwater management in the new development and redevelopment.
6. Pollution prevention/good housekeeping for municipal operations.

Section 6(k) of the MS4 General Permit requires a municipality to modify their Stormwater Management Plan to implement the TMDL within 4 months of TMDL approval by EPA if stormwater within the municipality contributes pollutant(s) in excess of the allocation established within the TMDL. For the discharges to the TMDL waterbody(ies), the municipality must assess the six minimum measures of its plan and modify the plan to implement additional, necessary controls for each appropriate measure. Particular focus should be placed on the following plan components: public education program, illicit discharge detection and elimination, stormwater structures cleaning, priority for the repair, upgrade, or retrofit of storm sewer structures. The goal of the modifications is to establish a program to improve water quality consistent with the requirements of the TMDL. Modifications to the Stormwater Management Plan in response to TMDL development should be submitted to the Stormwater Program of CTDEP for review and approval.

Also required under the MS4 General Permit is annual stormwater monitoring. The permit provides a general framework for monitoring stormwater quality within a municipality. At minimum, stormwater from six sample locations are to be collected annually: two outfalls from commercial areas, two from industrial areas, and two from residential areas. These six sample locations are point source discharges that drain areas with distinct characteristics. Each

stormwater sample is tested for 12 parameters using methods prescribed in Title 40, CFR, Part 136.

pH (SU)	Total Suspended Solids (mg/l)
Hardness (mg/l)	Total Phosphorous (mg/l)
Conductivity (umos)	Ammonia (mg/l)
Oil and grease (mg/l)	Total Kjeldahl Nitrogen (mg/l)
Chemical Oxygen Demand (mg/l)	Nitrate plus Nitrite Nitrogen (mg/l)
Turbidity (NTU)	E. coli (col/100ml)

However, CTDEP encourages municipalities affected by the establishment of a TMDL to develop an alternative stormwater monitoring plan to assess progress in meeting the goals of the TMDL. Alternate monitoring programs are established in accordance with Section 6(h)(1)(B) of the MS4 permit which allows towns to submit written requests to the Commissioner for the review and approval of alternate stormwater monitoring plans of equivalent or greater scope. This gives towns freedom to develop a plan that better assesses the stormwater quality in their watershed. The monitoring program should be designed to accomplish two objectives; source detection to identify specific sources of bacterial loading and direct BMP implementation efforts with fixed station monitoring to quantify progress in achieving TMDL established goals. Monitoring may be performed by municipal staff, citizen volunteers, or contracted to an environmental consulting firm. In order to secure DEP approval, the program must include sampling to address both objectives (source detection and progress quantification). Source detection monitoring may include such activities as visual inspection of storm sewer outfalls under dry weather conditions, event sampling of individual storm sewer outfalls, and monitoring of ambient (in-stream) conditions at closely spaced intervals to identify "hot spots" for more detailed investigations leading to specific sources of high bacteria loads.

DEP strongly recommends that stream monitoring be performed at the same locations DEP sampled during TMDL development. Samples should also be collected at other key locations within the watershed, such as above and below potential contributing sources or areas slated for BMP implementation. Since watershed borders and TMDLs do not follow town borders there is a possibility DEP did not sample locations in your town. If this is the case collecting a sample where the waterbody enters your town and another where the waterbody leaves your town maybe helpful to determine how stormwater from your town influences water quality. In all cases, sampling should be scheduled at regularly spaced intervals during the recreational season. In this way, the data set at the end of each season will include ambient values for both "wet" and "dry" conditions.



## **Appendix C. Cumulative Frequency Distribution Function Method**

# **DEVELOPMENT OF TOTAL MAXIMUM DAILY LOADS (TMDLs) FOR INDICATOR BACTERIA IN CONTACT RECREATION AREAS USING THE CUMULATIVE FREQUENCY DISTRIBUTION FUNCTION METHOD**

**Lee E. Dunbar, Assistant Director**  
**Mary E. Becker, Environmental Analyst**  
**CT Department of Environmental Protection**  
**Total Maximum Daily Load Program**

**Last revised: November 8, 2005**

## **OVERVIEW OF APPROACH**

The analytical methodology presented in this document provides a defensible scientific and technical basis for establishing TMDLs to address recreational use impairments in surface waters. Representative ambient water quality monitoring data for a minimum of 21 sampling dates during the recreational season (May 1 – September 31) is required for the analysis. The reduction in bacteria density from current levels needed to achieve consistency with the criteria is quantified by calculating the difference between the cumulative relative frequency of the sample data set and the criteria adopted by Connecticut to support recreational use. Connecticut's adopted water quality criteria for indicator bacteria (*Escherichia coli*) are represented by a statistical distribution of the geometric mean 126 and log standard deviation 0.4 for purposes of the TMDL calculations.

TMDLs developed using this approach are expressed as the average percentage reduction from current conditions required to achieve consistency with criteria. The procedure partitions the TMDL into wet weather allocation and dry weather allocation components by quantifying the contribution of ambient monitoring data collected during periods of high stormwater influence and minimal stormwater influence to the current condition. The partition is used to determine the effect of high stormwater influence on the contribution of sources to the waterbody. TMDLs developed using this analytical approach provide an ambient monitoring benchmark ideally suited for quantifying progress in achieving water quality goals as a result of TMDL implementation.

## **APPLICABILITY**

The methodology is intended solely for use in developing TMDLs for waters that are identified as impaired on the *List of Connecticut Water Bodies Not Meeting Water Quality Standards*<sup>1</sup>. It is expected that implementation of these TMDLs will be accomplished through implementing the provisions of the Small Municipal Separate Storm Sewer System general permit (MS4 permit)<sup>2</sup> in designated urban areas, as well as through measures that address non-point sources. The method as described here is not intended for use as an assessment tool for purposes of identifying use attainment status relative to listing or delisting of waterbody segments pursuant to Section 303(d) of the federal Clean Water Act. Assessment of use support is performed in accordance

with the Department's guidance document, *Connecticut Consolidated Assessment and Listing Methodology (CT-CALM)* <sup>3</sup>.

## BACKGROUND

TMDLs are established by the State in accordance with the requirements established in the federal Clean Water Act. Section 303(d) of the Act requires the State to perform an assessment of waters within the State relative to their ability to support designated uses including recreational use. The procedure used by the Department to assess use attainment is described in the guidance document, *CT-CALM* <sup>3</sup>. The list of waterbody segments in Connecticut that do not currently support recreational use is updated to incorporate the most recent monitoring information by the Department every two years. As a result of this process, waterbodies may be added to or deleted from the list of impaired waters in accordance with the *CT-CALM* guidance. Once complete, the list is submitted to the Regional office of the federal EPA for approval. Section 303(d) of the Act requires the State to establish TMDLs for each pollutant contributing to the impairment of each waterbody segment identified on the list.

## WATER QUALITY CRITERIA FOR INDICATOR BACTERIA

Connecticut's adopted water quality criteria for the indicator bacteria *Escherichia coli* (*E.coli*) in the CT Water Quality Standards <sup>4</sup> include a geometric mean and upper confidence limit (i.e. single sample maximum), which are based on three recreational use categories. The categories include designated swimming, non-designated swimming, and all other recreational uses. 'Designated swimming' includes areas that have been designated by State or Local authorities. 'Non-designated swimming' includes waters suitable for swimming but have not been designated by State or Local authorities, as well as water that support recreational activities where full body contact is likely, such as tubing or water skiing. 'All other recreational uses' include waters that support recreational activities where full body contact is infrequent, such as fishing, boating, kayaking, and wading. The recreational uses and applicable criteria are provided in the following table.

Recreational Use Category	Indicator Bacteria	Geometric Mean	Single Sample Maximum Upper Confidence Limit
Designated Swimming	<i>E.coli</i>	126col/100mls	235col/100mls 75 <sup>th</sup> Percentile
Non-designated Swimming			410col/100mls 90 <sup>th</sup> Percentile
All Other Recreational Uses			576col/100mls 95 <sup>th</sup> Percentile

**Table 1. Applicable indicator bacteria (*E.coli*) water quality criteria for recreational uses**

The indicator bacteria, *E. coli*, is not pathogenic, rather its presence in water is an indicator of contamination with fecal material that may also contribute pathogenic organisms. Connecticut's



criteria are based on federal guidance<sup>5</sup>. In this guidance, the basis for the criteria and the relationship between the geometric mean criterion and the single sample maximum criterion is explained in detail.


The geometric mean criterion was derived by EPA scientists from epidemiological studies at beaches where the incidence of swimming related health effects (gastrointestinal illness rate) could be correlated with indicator bacteria densities. EPA's recommended criteria reflect an average illness rate of 8 illnesses per 1000 swimmers exposed. This condition was predicted to exist based on studies cited in the federal guidance when the steady-state geometric mean density of *E. coli* was 126 col/100ml. The distribution of individual sample results around the geometric mean is such that approximately half of all individual samples are expected to exceed the geometric mean and half will be below the geometric mean.

EPA also derived a single sample maximum criterion from this same database to support decisions by public health officials regarding the closure of beaches when an elevated risk of illness exists. Because approximately half of all individual sample results for a beach where the risk of illness is considered "acceptable" are expected to exceed the geometric mean criteria of 126 col/100ml, an upper boundary to the range of individual sample results was statistically derived that will be exceeded at frequencies less than 50% based on the variability of sample data. The mean log standard deviation for *E. coli* densities at the freshwater beach sites studied by EPA was 0.4. The single sample maximum criterion of 235 col/100mls, 410 col/100mls, and 576 col/100mls adopted by Connecticut represents the 75<sup>th</sup>, 90<sup>th</sup>, and 95<sup>th</sup> percentile upper confidence limit, respectively, for a statistical distribution of data with a geometric mean of 126 and a log standard deviation of 0.4 as recommended by EPA<sup>5</sup>.

Consistent with the State's disinfection policy (Water Quality Standard #23), the critical period for application of the indicator bacteria criteria is the recreational season, defined as May 1 through September 30. For waters that do not receive point discharges of treated sewage subject to the disinfection policy, a review of ambient monitoring data contained in the State's Ambient Monitoring Database<sup>6</sup> confirms that bacteria densities are typically highest during the summer months. Consistency with criteria during the summer is indicative of consistency at all times of the year. Lower densities reported during other portions of the year are most likely a result of several environmental factors including more rapid die-off of enteric bacteria in colder temperatures and reduced loadings from wildlife and domestic animal populations. Further, human exposure to potentially contaminated water is greatly reduced during the colder months, particularly exposure that results from immersion in the water since cold temperatures discourage participation in recreational activities that typically involve immersion.

Connecticut's adopted criteria are based on federal guidance and reflect an idealized distribution of bacteria monitoring data for sites studied by EPA that can be represented by statistical distribution with a geometric mean of 126 col/100ml and a log standard deviation of 0.4. The criteria can therefore be expressed as a cumulative frequency distribution or "criteria curve" as shown in figures 1a through 1c for each of the specified recreational uses in Connecticut's bacteria criteria.

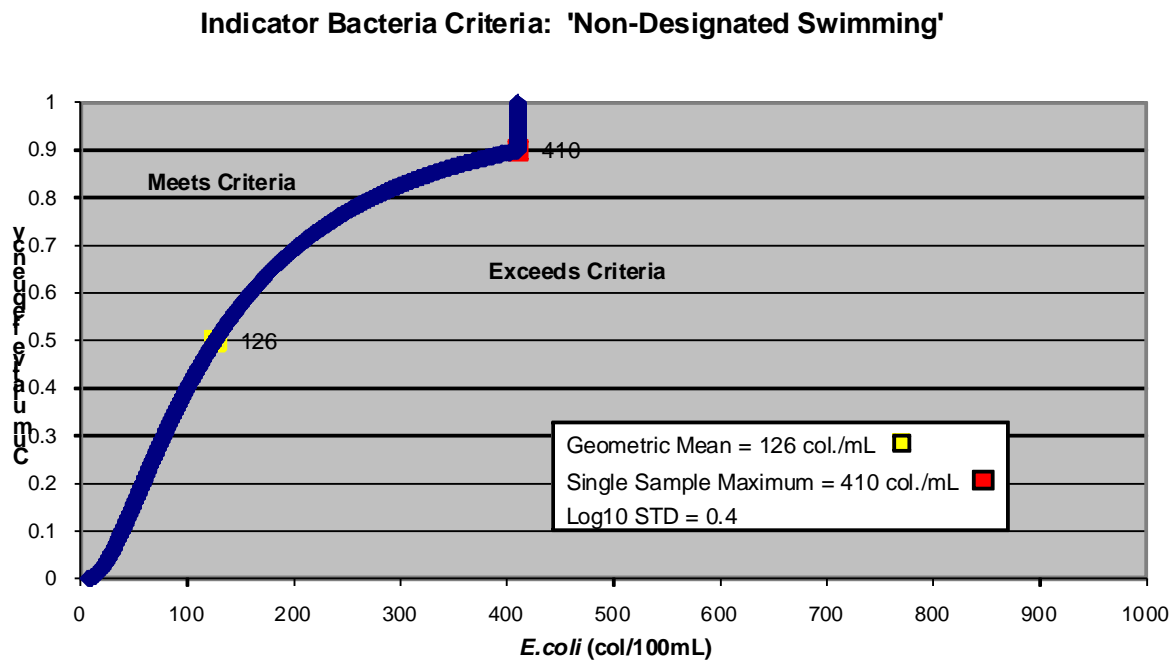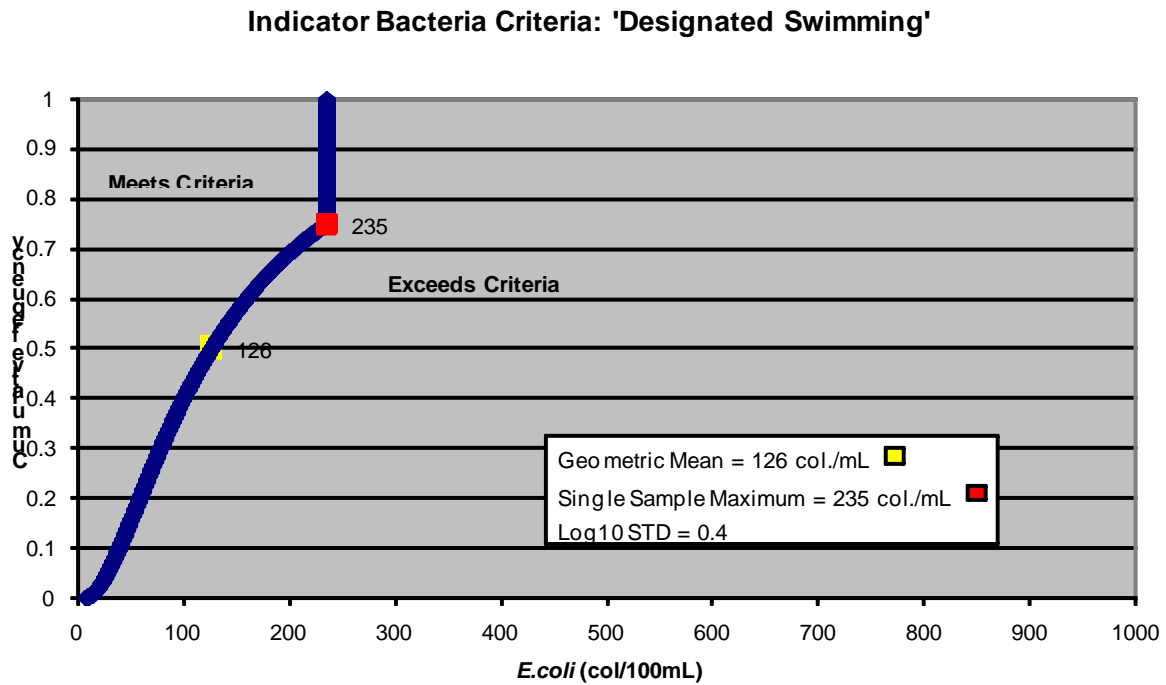


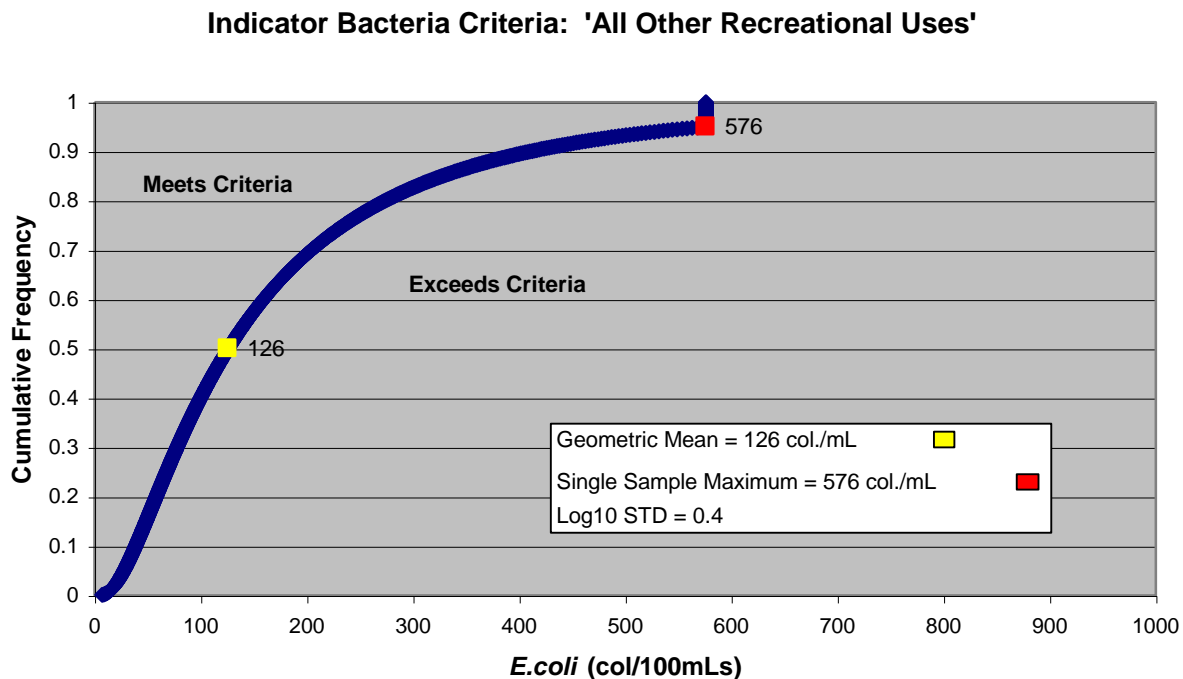


**Figure 1c. Cumulative Relative Frequency Distribution representing water quality criteria to support all other recreational uses.**

## **TMDL**

As with the cumulative relative frequency curves representing the criteria shown in Figure 1a through 1c, a cumulative relative frequency curve can be prepared using site-specific sample data to represent current conditions at the TMDL monitoring site. The TMDL for the monitored segment is derived by quantifying the difference between these two distributions as shown conceptually in Figures 2a through 2c. This is accomplished by calculating the reduction required at representative points on the sample data cumulative frequency distribution curve and then averaging the reduction needed across the entire range of sampling data. This procedure allows the contribution of each individual sampling result to be considered when estimating the percent reduction needed to meet a criterion that is expressed as a geometric mean.

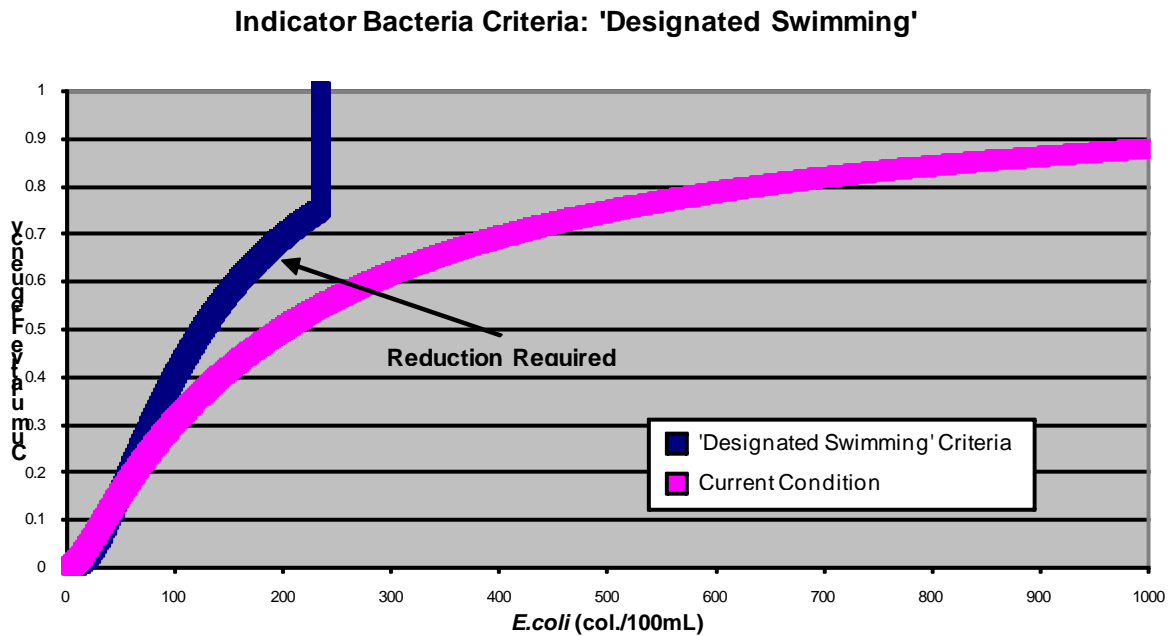


**Figure 2a.** Reduction indicator bacteria density needed from current condition to meet 'designated swimming' criteria based on cumulative relative frequency distribution.

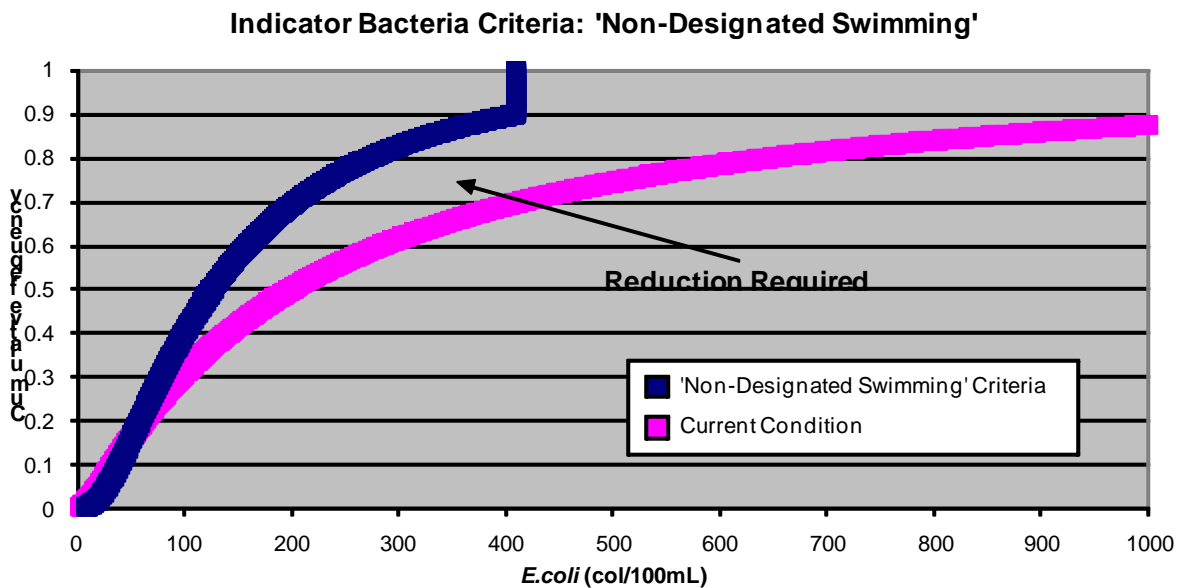

**Figure 2b.** Reduction indicator bacteria density needed from current condition to meet 'non-designated swimming' criteria based on cumulative relative frequency distribution.



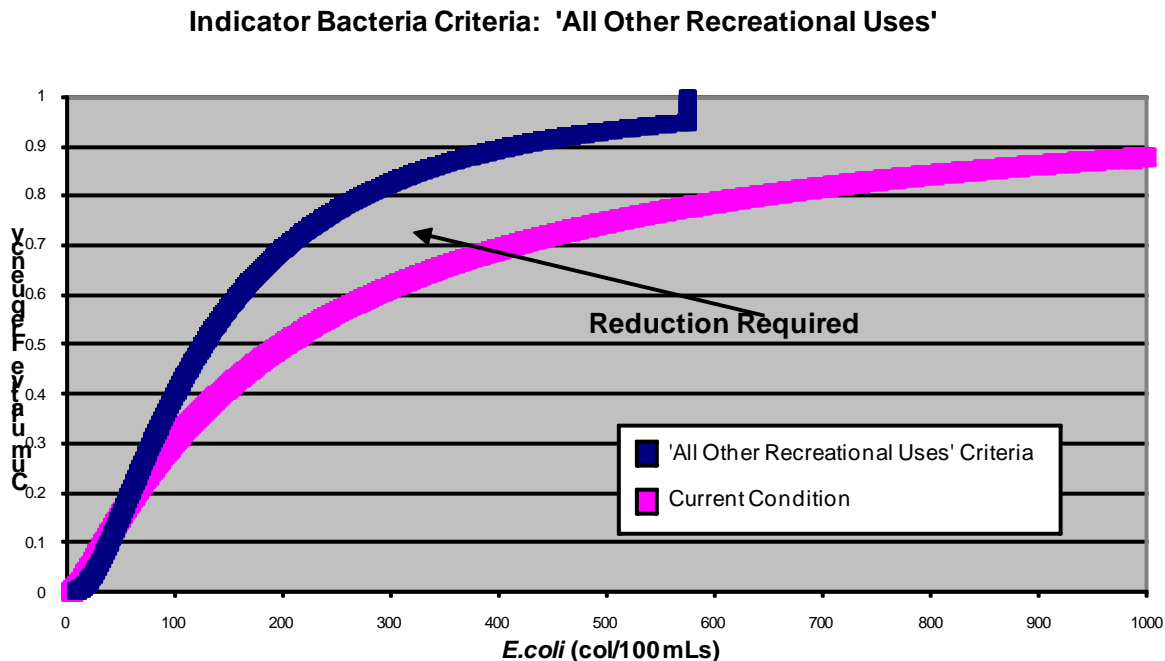

**Figure 2c. Reduction indicator bacteria density needed from current condition to meet ‘all other recreational uses’ criteria based on cumulative relative frequency distribution.**

## TMDL ALLOCATIONS

Federal regulations require that the TMDL analysis identify the portion of the total loading which is allocated to point source discharges and the portion attributed to non-point sources, which contribute that pollutant to the waterbody. Stormwater runoff is considered a point source subject to regulation under the NPDES permitting program in designated urbanized areas. Designated urban areas, as defined by the US Census Bureau <sup>7</sup>, are required to comply with the General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (MS4 permit). The general permit is applicable to municipalities that contain designated urban areas (or MS4 communities) and discharge stormwater via a separate storm sewer system to surface waters of the State. TMDLs for indicator bacteria in waters draining urbanized areas must therefore be partitioned into a WLA to accommodate point source stormwater loadings of indicator bacteria and a LA to accommodate non-point loadings from unregulated sources. One common characteristic of urbanized areas is the high percentage of impervious surface. Much of the impervious surface is directly connected to nearby surface waters through stormwater drainage systems. As a result, runoff is rapid following rain events and flow in urban streams is typically dominated by stormwater runoff during these periods. Monitoring results for samples collected under these conditions are strongly influenced by stormwater quality. During dry conditions, urban streams contain little stormwater since urban watersheds drain quickly and baseflows are reduced due to lower infiltration rates and reduced

recharge of groundwater. At baseflow, urban stream water quality is dominated by non-point sources of indicator bacteria since stormwater outfalls are inactive.

A WLA for stormwater discharges is not warranted in non-designated urbanized areas and in waterbody segments where there are no stormwater outfalls. As such, sources of bacteria in these waterbodies segments are attributed solely to nonpoint sources. However, wet weather and dry weather percent reductions are partitioned in the LA analysis to demonstrate the effect of stormwater events on the contribution of nonpoint sources of bacteria to the waterbody.

The relative contribution of indicator bacteria loadings occurring during periods of high or low stormwater influence to the geometric mean indicator density is estimated by calculating separate averages of the reduction needed to achieve consistency with criteria under “wet” and “dry” conditions. In urbanized areas, the reduction needed under “wet” conditions is assigned to the WLA and the reduction needed under “dry” conditions is assigned to the LA. In non-designated urbanized areas, the LA is comprised of “wet” and “dry” conditions, which are partitioned into separate reduction goals. Separate reduction goals are established for baseflow and stormwater dominated periods that can assist local communities in selection of best management practices to improve water quality. The technique also facilitates the use of ambient stream monitoring data to track future progress in meeting water quality goals.

The sources contributing to the WLA and LA can be further subdivided depending on knowledge of sources present in the watershed (Table 2). Some existing sources such as dry weather flows from stormwater collections systems, illicit discharges to stormwater systems, and combined sewer overflows are allocated “100 percent reduction” since the management goal for these sources is elimination. Permitted discharges of treated and disinfected domestic wastewater (sewage treatment plants) are allocated “zero percent reduction” since disinfection required by the NPDES permit is sufficient to reduce indicator bacteria levels to below levels of concern. Natural sources such as wildlife are also allocated a “zero percent reduction” since the management goal is to foster a sustainable natural habitat and stream corridor to the extent practicable. Management measures to control nuisance populations of some wildlife species that can result in elevated indicator bacteria densities such as Canadian geese however should be considered in developing an overall watershed management plan. The management goal for point sources in designated swimming areas is elimination when the source is determined to be the main contributor of bacteria to the swimming area. This is consistent with the United States Environmental Protection Agency’s (EPA) advisory for swimmers to avoid areas with discharge pipes<sup>8</sup> and a recent study indicating an increased potential for health risk to people swimming in areas near storm drains<sup>9</sup>.

Source	Critical Conditions	Assigned To
On-Site Septic	Baseflow (DRY)	LA
Domestic Animal	Baseflow (DRY)	LA
Natural (Wildlife)	Baseflow (DRY)	LA
Wastewater Treatment Plants	Baseflow (DRY)	WLA
Regulated Urban Runoff/Storm Sewers	Wet Weather Flow (WET)	WLA

Source	Critical Conditions	Assigned To
Dry Weather Overflow	Baseflow (DRY)	None
Illicit Discharges	Baseflow (DRY)	None
Combined Sewer Overflow	Wet Weather Flow (WET)	None

**Table 2: Establishing WLA and LA Pollutant Sources**

## MARGIN OF SAFETY

Federal regulations require that all TMDL analyses include either an implicit or explicit margin of safety (MOS). The analytical approach described here incorporates an implicit MOS. Factors contributing to the MOS include assigning a percent reduction of “zero” to sampling results that indicate quality better than necessary to achieve consistency with the criteria. The increase in loadings on those dates that could be assimilated by the stream without exceeding criteria is not quantified (as a negative percent reduction) and averaged with the load reductions needed on other sampling dates. Rather, this excess capacity is averaged as a zero value thereby contributing to the implicit MOS.

The means of implementing the TMDL also contributes to the MOS. The loading reductions specified in the TMDL for regulated stormwater discharges and nonpoint sources must be sufficient to achieve water quality standards since confirmation that these reductions have been achieved will be based on ambient monitoring data documenting that water quality standards are met. Further, achieving compliance with the requirements of the MS4 permit includes elimination of high loading sources such as illicit discharges and dry weather overflows from storm sewer systems. Eliminating loads from these sources, as opposed to allocating a percent reduction equal to that given other sources, contributes to the implicit MOS. Further assurance that implementing the TMDL will meet water quality standards is provided by the iterative implementation required for compliance with the MS4 permit. This approach mandates that additional management efforts must be implemented until ambient monitoring data confirms that standards are met.

Many of the best management practices that are implemented to address either wet or dry weather sources will have some degree of effectiveness in reducing loads under all conditions. For example, the TMDL allocates all the percent reduction needed to meet standards under wet weather conditions to the WLA. However, reductions resulting from best management practices implemented to reduce dry weather loads (LA) will provide some benefit during wet weather conditions as well. These reductions also contribute to the implicit MOS.

## DATA REQUIREMENTS

Ambient monitoring data for a minimum of 21 sampling dates during the recreational season (May 1 – September 30) is required. Data collected at other times during the year are excluded from the analysis. In addition to data on indicator bacteria density, precipitation data for each

sampling date and the week prior to the sampling is necessary. Sampling dates should be selected to insure that representative data is available for both wet and dry conditions. This may be accomplished most easily by selecting sampling dates without prior knowledge of the meteorological conditions likely to be encountered on that date.

Data must reflect current conditions in the TMDL segment. The monitoring location where data is collected must therefore be sited in an area that can be considered representative of water quality throughout the TMDL segment. Data obtained under unusual circumstances may be excluded from the analysis provided the reason for excluding that data is provided in the TMDL. Potential reasons for excluding data may include such things as evidence that a spill, upset in wastewater treatment, or sewer line breakage occurred that resulted in a short-term excursion from normal conditions. Data that represent conditions during an extreme storm event that resulted in widespread failure of wastewater treatment or stormwater best management practices may also be excluded. However, data for periods following typical rainfall events must be retained. Reasons for excluding any data must be provided in the TMDL Analysis.

All data must be less than five years old. If circumstances in any watershed suggest that conditions have changed during the most recent five-year period, the analysis may be restricted to more recent data in order to be representative of the current status provided the minimum data requirements are met.

Assurance of acceptable data quality must be provided. Typically, all data should be collected and results analyzed and reported pursuant to an EPA approved Quality Assurance Project Plan (QAPP). Data collected in the absence of a QAPP may be acceptable provided there is evidence that confirms acceptable data quality.

## **ANALYTICAL PROCEDURE – TMDL**

### **1.**

The *E. coli* monitoring data is ranked from lowest to highest. In the event of ties, monitoring results are assigned consecutive ranks in chronological order of sampling date. The sample proportion ( $p$ ) is calculated for each monitoring result by dividing the assigned rank ( $r$ ) for each sample by the total number of sample results ( $n$ ):

$$p = r / n$$

### **2.**

Next, a single sample criteria reference value is calculated for each monitoring result according to the specified recreational use (designated swimming, non-designated swimming, or all other) in a waterbody segment from the statistical distribution used to represent the criteria following the procedure described in steps **3 - 6** below:

3.

Designated Swimming	Non-Designated Swimming	All Other Recreational Uses
If the sample proportion is $\geq 0.75$ , the single sample criteria reference value is equivalent to the single sample criterion adopted into the Water Quality Standards (235 col/100ml)	If the sample proportion is $\geq 0.90$ , the single sample criteria reference value is equivalent to the single sample criterion adopted into the Water Quality Standards (410 col/100ml)	If the sample proportion is $\geq 0.95$ , the single sample criteria reference value is equivalent to the single sample criterion adopted into the Water Quality Standards (576 col/100ml)

4.

Designated Swimming	Non-Designated Swimming	All Other Recreational Uses
If the sample proportion is less than 0.75, and greater than 0.50, the single sample criteria reference value is calculated as:	If the sample proportion is less than 0.90, and greater than 0.50, the single sample criteria reference value is calculated as:	If the sample proportion is less than 0.95, and greater than 0.50, the single sample criteria reference value is calculated as:

$$\text{criteria reference value} = \text{antilog}_{10} [\log_{10} 126 \text{ col/100ml} + (F * 0.4)]$$

N.B. 126 col/100ml is the geometric mean indicator bacteria criterion adopted into Connecticut's Water Quality Standards,  $F$  is a factor determined from areas under the normal probability curve for a probability level equivalent to the sample proportion, 0.4 is the  $\log_{10}$  standard deviation used by EPA in deriving the national guidance criteria recommendations (Table 4).

5.

Designated Swimming	Non-Designated Swimming	All Other Recreational Uses
If the sample proportion is equal to 0.50, the single sample reference criteria value is equal to the geometric mean criterion adopted into the Water Quality Standards (126 col/100 ml)		

6.

Designated Swimming	Non-Designated Swimming	All Other Recreational Uses
If the sample proportion is less than 0.50, the single sample reference criteria value is calculated as:		

$$\text{criteria reference value} = \text{antilog}_{10} [\log_{10} 126 \text{ col/100ml} - (F * 0.4)]$$

7. The percent reduction necessary to achieve consistency with the criteria is then calculated following the procedure described in steps 8 - 9 below:

8. If the monitoring result is less than the single sample reference criteria value, the percent reduction is zero.
9. If the monitoring result exceeds the single sample criteria reference value, the percent reduction necessary to meet criteria on that sampling date is calculated as:

$$\text{percent reduction} = [(\text{monitoring result} - \text{criteria reference value}) / \text{monitoring result}] * 100$$

10. The TMDL, expressed as the average percent reduction to meet criteria, is then calculated as the arithmetic average of the percent reduction calculated for each sampling date.

### **ANALYTICAL PROCEDURE – WET AND DRY WEATHER EVENTS**

Precipitation data is reviewed and each sampling date is designated as a “dry” or “wet” sampling event. Although a site-specific protocol may be specified in an individual TMDL analysis, “wet” conditions are typically defined as greater than 0.1 inches precipitation in 24 hours or 0.25 inches precipitation in 48 hours, or 2.0 inches precipitation in 96 hours.

In designated urbanized areas the average percent reduction for all sampling events used to derive the TMDL that are designated as “wet” is computed and established as the WLA. The average percent reduction for all sampling events used to derive the TMDL that are designated as “dry” is computed and established as the LA.

In areas that do not have point sources, the average percent reduction for all sampling events used to derive the TMDL that are designated “wet” is computed as the wet weather LA, and the average percent reduction for all sampling events used to derive the TMDL that are designated as “dry” is computed as the dry weather LA.

### **ANALYTICAL PROCEDURE – SPREADSHEET MODEL**

An Excel<sup>(tm)</sup> spreadsheet has been developed that performs all calculations necessary to derive a TMDL using this procedure. Copies of the spreadsheet in electronic form may be obtained from DEP by contacting Mary Becker at (860) 424-3262 or by email at [mary.becker@ct.gov](mailto:mary.becker@ct.gov).

## REFERENCES

1. 2004 List of Connecticut Water Bodies Not Meeting Water Quality Standards, Connecticut Department of Environmental Protection, Adopted April 28, 2004, approved June 24, 2004.
2. General Permit for the Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems. Connecticut Department of Environmental Protection. Issued January 9, 2004.
3. Connecticut Consolidated Assessment and Listing Methodology for 305(b) and 303(d) Reporting. Connecticut Department of Environmental Protection, April 2004.
4. Water Quality Standards. Connecticut Department of Environmental Protection. Effective December 17, 2002.
5. Ambient Water Quality Criteria for Bacteria – 1986. U.S. Environmental Protection Agency, Office of Water, January 1986. (EPA440/5-84-002).
6. Water Quality Database. Connecticut Department of Environmental Protection, Monitoring and Assessment Program.
7. U.S. Census Bureau, March 2002. [www.census.gov/geo/www/ua/ua\\_2k.html](http://www.census.gov/geo/www/ua/ua_2k.html)
8. Environmental Protection Agency, 2004. <http://www.epa.gov/beaches/>.
9. Haile, RW et al, 1999. *The Health Effects of Swimming in Ocean Water Contaminated by Storm Drain Runoff*. Epidemiology. 10 (4) 355-363.